



I hereby certify that this correspondence is being deposited with the United States Postal Service, with sufficient postage, as first class mail in an envelope addressed to:

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450
on June 14, 2004

Date of Deposit

Jonathan P. Taylor, Ph.D., Reg. No. 48,338

Name of applicant, assignee or
Registered Representative

[Handwritten Signature]
Signature
6/14/04

Date of Signature

Our Case No. 659/1770

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Daniel Hoo et al.

Serial No. 10/664,342

Filing Date: September 17, 2003

For WET ROLL HAVING UNIFORM
COMPOSITION DISTRIBUTION

Examiner

Jill M. Gray

Group Art Unit No. 1774

PETITION TO ACCORD FILING DATE PURSUANT TO 37 CFR 1.53(e)

Mail Stop Petitions
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-4150

Dear Sir:

In reply to the Notice of Incomplete Nonprovisional Application dated May 10, 2004, Applicants hereby petition that the items listed in the Notice were submitted to and were received by the U.S. Patent and Trademark Office as part of the nonprovisional application filing of September 17, 2003. Applicants further petition that this application should be accorded a filing date of September 17, 2003.

Submitted herewith are the following documents:

- 1) Check for \$130.00 for the petition fee, pursuant to 37 CFR 1.17(h);
- 2) Copy of Response to Notice of Incomplete Nonprovisional Application, submitted on June 14, 2004 under separate cover;
- 3) Copy of entire submission of Divisional Application filing of September 17, 2003; and
- 4) Copy of return postcard from the Divisional Application filing of September 17, 2003, bearing the stamp of the Office of Initial Patent Examination (OIPE);

REMARKS

The Notice of Incomplete Nonprovisional Application, dated May 10, 2004, asserts that a filing date has not been accorded to this application. A copy of this Notice is included in the attached copy of the Response to Notice of Incomplete Nonprovisional Application. In support of this assertion, the Notice states that: a) drawings were not included in the application filing, and b) the Declaration was incomplete, missing the signature of inventor Daniel Hoo.

Applicants respectfully traverse this assertion, as these items were included in the papers submitted as part of the Divisional Application filing of September 17, 2003. Moreover, these items were received by the Office of Initial Patent Examination (OIPE) at the U.S. Patent & Trademark Office as part of this application filing. The attached copy of the return postcard bears the stamp of the OIPE, dated September 17, 2003, acknowledging receipt of all the contents listed on the postcard. These contents include a complete set of drawings and a fully executed Declaration.

With respect to the Drawings, Applicants point out that the drawings in the present application were actually provided in two separate forms. First, the application filing included a Submission of Formal Drawings, which contained 10 sheets of formal drawings for Figures 1-15. The Submission of Formal Drawings and the 10 sheets of formal drawings are specifically listed on the return postcard. Second, the original drawings from the prior application were included with the copy of the prior application.

This is reflected in the Request for Filing a Continuing Patent Application, submitted as part of the application filing. Item 1 of this Request notes the inclusion of 11 sheets of drawings in addition to the 33 pages of application.

Applicants further point out that the Preliminary Amendment included as part of this application filing (and listed on the return postcard) included an amendment to the specification that expressly incorporates the prior application by reference. This incorporation by reference includes the drawings in the prior application. Even if a copy of the drawings had not been submitted, any drawings "necessary for the understanding of the subject matter sought to be patented" were effectively included in the present application by way of the incorporation by reference. Since the other item listed in the Notice, the executed oath or declaration, is not required for a filing date under 37 CFR 1.53(b), the incorporation by reference of the prior application provides at least the minimum filing requirements for the according of a filing date as of the "Date In" date on the Express Mail mailing label (EL 835293200 US for the September 17, 2003 application filing).

With respect to the Declaration, Applicants point out that the signature of inventor, Daniel Hoo appears on the first page of the Declaration. Due to the presence of co-inventors in multiple locations, multiple copies of the Declaration document were submitted. These copies differed only in the dated signatures present. The signature of Daniel Hoo, dated November 13, 2001, appears on the first and fourth pages of the combined Declaration document. The signature on the fourth page is a facsimile copy of the signature on the first page. Referring again to the Request for Filing a Continuing Patent Application, submitted as part of the application filing, item 2 of this Request notes the inclusion of a copy of the Declaration filed in the prior application.


In accordance with MPEP § 503, which states that "[a] postcard receipt which itemizes and properly identifies the items which are being filed serves as *prima facie* evidence of receipt in the USPTO of all the items listed thereon on the date stamped thereon by the USPTO," Applicants respectfully request that the present petition be granted.

Applicants respectfully request that the petition fee be refunded at such time as the present petition is granted, as required by MPEP § 601.01(d).

The Commissioner is hereby authorized to charge any fees required to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

June 14, 2004


Jonathan P. Taylor, Ph.D.
Registration No. 48,338
Agent for Applicant

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200



CERTIFICATE OF MAILING UNDER 37 C.F.R. §1.8

Whereby certify that this correspondence is being deposited with the United States Postal Service as first class mail, with sufficient postage, in an envelope addressed to: Commissioner for Patents, P. O. Box 1450, Alexandria, VA 22313-1450, on the below date:

Date: June 14, 2004

Name: Jonathan P. Taylor, Ph.D.

Signature:

BRINKS
HOFFER
GILSON
& LIONE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Appln. of: Daniel Hoo et al.

Appln. No.: 10/664,342

Filed: September 17, 2003

For: Wet Roll Having Uniform Composition
Distribution

Attorney Docket No: 659/1770

Examiner: Jill M. Gray

Art Unit: 1774

Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

TRANSMITTAL

Sir:

Attached is/are:

☒ Petition To Accord Filing Date Pursuant to 37 CFR 1.53(e); Copy of Response to Notice of Incomplete Nonprovisional application; copy of application papers as filed 9/17/03 along with copy of return postcard dated 9/17/03

☒ Return Receipt Postcard

Fee calculation:

☐ No additional fee is required.

☐ Small Entity.

☐ An extension fee in an amount of \$_____ for a _____-month extension of time under 37 C.F.R. § 1.136(a).

☒ A petition or processing fee in an amount of \$130 under 37 C.F.R. § 1.53(e).

☐ An additional filing fee has been calculated as shown below:

					Small Entity			Not a Small Entity	
	Claims Remaining After Amendment		Highest No. Previously Paid For	Present Extra	Rate	Add'l Fee	or	Rate	Add'l Fee
Total		Minus			x \$9=			x \$18=	
Indep.		Minus			x 43=			x \$86=	
First Presentation of Multiple Dep. Claim					+ \$145=			+ \$290=	
					Total	\$		Total	\$

Fee payment:

☒ A check in the amount of \$130 is enclosed.

☐ Please charge Deposit Account No. 23-1925 in the amount of \$_____. A copy of this Transmittal is enclosed for this purpose.

☐ Payment by credit card in the amount of \$_____ (Form PTO-2038 is attached).

☒ The Director is hereby authorized to charge payment of any additional filing fees required under 37 CFR § 1.16 and any patent application processing fees under 37 CFR § 1.17 associated with this paper (including any extension fee required to ensure that this paper is timely filed), or to credit any overpayment, to Deposit Account No. 23-1925.

Respectfully submitted,

Jonathan P. Taylor, Ph.D. (Reg. No. 48,338)

Date

June 14, 2004



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
 United States Patent and Trademark Office
 Address: COMMISSIONER FOR PATENTS
 P.O. Box 1450
 Alexandria, Virginia 22313-1450
 www.uspto.gov

APPLICATION NUMBER	FILING OR 371 (c) DATE	FIRST NAMED APPLICANT	ATTORNEY DOCKET NUMBER
10/664,342	09/17/2003	Daniel Hoo	659/1770

Andrew D. Stover
 BRINKS HOFER GILSON & LIONE
 P.O. BOX 10395
 CHICAGO, IL 60610



CONFIRMATION NO. 4123

FORMALITIES LETTER



OC000000012563889

Date Mailed: 05/10/2004

NOTICE OF INCOMPLETE NONPROVISIONAL APPLICATION

FILED UNDER 37 CFR 1.53(b)

A filing date has NOT been accorded to the above-identified application papers for the reason(s) indicated below.

All of the items noted below and a newly executed oath or declaration covering the items must be submitted within **TWO MONTHS** of the date of this Notice, unless otherwise indicated, or proceedings on the application will be terminated (37 CFR 1.53(e)). Replies should be mailed to: Mail Stop Missing Parts, Commissioner for Patents, P.O. Box 1450, Alexandria VA 22313-1450.

The filing date will be the date of receipt of all items required below, unless otherwise indicated. Any assertions that the item(s) required below were submitted, or are not necessary for a filing date, must be by way of petition directed to the attention of the Office of Petitions accompanied by the \$130.00 petition fee (37 CFR 1.17(h)). If the petition states that the application is entitled to a filing date, a request for a refund of the petition fee may be included in the petition. Petitions should be mailed to: Mail Stop Petitions, Commissioner for Patents, P.O. Box 1450, Alexandria VA 22313-1450.

- The application was deposited without drawings. 35 U.S.C. 113 (first sentence) requires a drawing "where necessary for the understanding of the subject matter sought to be patented." *Applicant should reconsider whether the drawings are necessary under 35 U.S.C. 113 (first sentence).*
- The signature of the following inventor(s) is missing from the oath or declaration:
Daniel Hoo


Replies should be mailed to: Mail Stop Missing Parts
 Commissioner for Patents
 P.O. Box 1450
 Alexandria VA 22313-1450

06/21/2004 BSAYASII 00000034 10664342

01-FC-1460

130.00-00

*A copy of this notice **MUST** be returned with the reply.*

A handwritten signature in black ink, appearing to be 'L. M. L.', is written over a horizontal line.

Customer Service Center

Initial Patent Examination Division (703) 308-1202

PART 2 - COPY TO BE RETURNED WITH RESPONSE



I hereby certify that this correspondence is being deposited with the United States Postal Service, with sufficient postage, as first class mail in an envelope addressed to:

Commissioner for Patents
P.O. Box 1450
Alexandra, VA 22313-1450
on June 14, 2004

Date of Deposit

Jonathan P. Taylor, Ph.D., Reg. No. 48,338

Name of applicant, assignee or
Registered Representative

Signature

6/14/04

Date of Signature

Our Case No. 659/1770

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Daniel Hoo et al.

Serial No. 10/664,342

Filing Date: September 17, 2003

For WET ROLL HAVING UNIFORM
COMPOSITION DISTRIBUTION

Examiner Jill M. Gray

Group Art Unit No. 1774

RESPONSE TO NOTICE OF INCOMPLETE NONPROVISIONAL APPLICATION

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-4150

Dear Sir:

In reply to the Notice of Incomplete Nonprovisional Application dated May 10, 2004, Applicants hereby traverse the assertion that the application filing of September 17, 2003 was incomplete.

Submitted herewith are the following documents:

- 1) Copy of Notice of Incomplete Nonprovisional Application;
- 2) Copy of original drawings from prior application 09/900,516, previously submitted as part of the application filing of September 17, 2003;
- 3) Copy of Submission of Formal Drawings, previously submitted as part of the application filing of September 17, 2003;
- 4) Copy of Declaration, including the signature of inventor Daniel Hoo, previously submitted as part of the application filing of September 17, 2003.
- 5) Copy of Petition pursuant to 37 CFR 1.53(e), submitted on June 14, 2004 under separate cover; and
- 6) Copy of return postcard from the Divisional Application filing of September 17, 2003, bearing the stamp of the Office of Initial Patent Examination (OIPE);

REMARKS

The accompanying Petition provides a detailed explanation showing that the items listed in the Notice were, in fact, received by the U.S. Patent & Trademark Office. In brief, the return postcard bears the stamp of the OIPE, dated September 17, 2003, acknowledging receipt of all the contents listed on the postcard. These contents included a complete set of drawings and a fully executed Declaration. Accordingly, Applicants request that this application be accorded a filing date of September 17, 2003.


Applicants further note that a newly executed oath or declaration, as requested in the Notice, is unnecessary. All of the required documents were submitted as part of the application filing of September 17, 2003. With respect to the drawings, in addition to the evidence that a complete set of drawings was received by OIPE, the Preliminary Amendment included as part of this Divisional Application filing included an amendment to the specification that expressly incorporates the prior application by reference. This incorporation by reference includes the drawings in the prior application. Thus, the present submissions should not be considered a submission of the application drawings after the initial filing date.

Applicants submit that the present application is now ready for examination on the merits. Should the Examiner feel a discussion would expedite the prosecution of this application, the Examiner is kindly invited to contact the undersigned.

The Commissioner is hereby authorized to charge any fees required to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

June 14, 2004


Jonathan P. Taylor, Ph.D.
Registration No. 48,338
Agent for Applicant

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200



Serial No.
Applicant: DANIEL HOO ET AL.
Client/Matter No.: 659/1770

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

22278 U.S. PTO
10/664342
09/17/03

Please acknowledge receipt of the below identified:

Items Mailed: Request for Filing a Continuing Patent Application (2), 34
page Specification, Submission of Formal Drawings, 10 sheets Formal
Drawings, Preliminary Amendment, Declaration, Information Disclosure
Statement, Form PTO 1449, check for \$768 and return postcard.


BRINKS HOFER GILSON & LIONE

By: Jonathan P. Taylor, Ph.D., Reg. No. 48,338

Date of Mailing: September 17, 2003

Express Mail EL835293200US

BEST AVAILABLE COPY

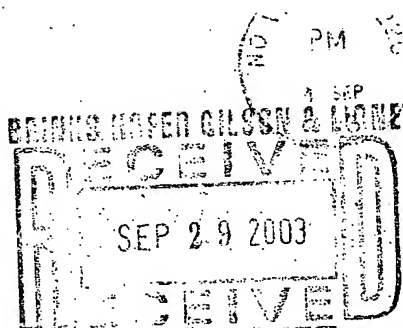

Carlsbad Caverns National Park, NM

U. S. BRINKS HOFER GILSON & LIONE

A PROFESSIONAL CORPORATION

P. O. BOX 10395

CHICAGO, ILLINOIS 60610





BEST AVAILABLE COPY



EL 835293200 US



UNITED STATES POSTAL SERVICE®

**POST OFFICE
TO ADDRESSEE**

**SEE REVERSE SIDE FOR
SERVICE GUARANTEE AND LIMITS
ON INSURANCE COVERAGE**

ORIGIN (POSTAL USE ONLY)		
PO Zip Code <i>60611</i>	Day of Delivery <input checked="" type="checkbox"/> Next <input type="checkbox"/> Second	Flat Rate Envelope <input type="checkbox"/>
Date In <i>9/17/03</i>	<input checked="" type="checkbox"/> 12 Noon <input type="checkbox"/> 3 PM	Postage <i>\$13.65</i>
Time In <i>4:45</i>	<input type="checkbox"/> AM <input checked="" type="checkbox"/> PM	Return Receipt Fee
Weight <i>1</i> lbs. <i>3</i> ozs.	Int'l Alpha Country Code	COD Fee Insurance Fee
No Delivery <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday	Acceptance Clerk Initials <i>AR</i>	Total Postage & Fees <i>\$13.65</i>

☐ **WAIVER OF SIGNATURE** (Domestic Only): Additional merchandise insurance is void if waiver of signature is requested. I wish delivery to be made without obtaining signature of addressee or addressee's agent (if delivery employee judges that article can be left in secure location) and I authorize that delivery employee's signature constitutes valid proof of delivery.

NO DELIVERY ☐ Weekend ☐ Holiday Customer Signature: _____

CUSTOMER USE ONLY

METHOD OF PAYMENT:

Express Mail Corporate Acct. No. *659/1770 JPT*

Federal Agency Acct. No. or
Postal Service Acct. No.

FROM: (PLEASE PRINT)

PHONE ()

BRINKS HOFER GILSON & LIONE
455 N CITYFRONT PLAZA DR STE 330
CHICAGO IL 60611-5330

TO: (PLEASE PRINT)

PHONE ()


PATENT APPLICATION
Commissioner For Patents
P.O. Box 1450
Alexandria, VA 22313-1450

FOR PICKUP OR TRACKING CALL 1-800-222-1811 www.usps.com



Customer Copy
Label 11-F August 2000

39/



"Express Mail" mailing label number EL 835293200 US

Date of Deposit September 17, 2003.

REQUEST FOR FILING A CONTINUING PATENT APPLICATION UNDER 37 CFR § 1.53(b)(1)

Case No.	ANTICIPATED CLASSIFICATION OF THIS APPLICATION		PRIOR APPLICATION EXAMINER	ART UNIT
659/1770	CLASS	SUBCLASS	Jill M. Gray	1774

Address to:

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

This is a request for filing a ☐ continuation ☒ divisional application under 37 CFR § 1.53(b)(1), of pending prior application number 09/900,516, filed on July 6, 2001, entitled WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION.

- ☒ Copy Of the Prior application, including 11 sheets of drawings, 33 pages of Application, and the following Appendices Title Page (1).
- ☒ Copy of the Declaration filed in the Prior application.
- ☒ PTO Form 1449 and Information Disclosure Statement.

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	21 - 20 =	1	x \$ 18 =	\$18
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	3 - 3 =	0	x \$ 84 =	\$0
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			+ \$280 =	\$ 0
				BASIC FEE (37 CFR 1.16(a))	\$ 750
				Total of above Calculations =	\$
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28)				\$
				TOTAL =	\$768

- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 1.27
☐ is enclosed.
☐ was filed in prior application number _____ and such status is still proper and desired (37 CFR 1.28(a)).
- ☒ The Commissioner is hereby authorized to charge any fees which may be required under 37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☒ Enclosed is a check for \$ 768 to cover the filing fees.
- ☒ Cancel in this application original claims 22-43 of the prior application and otherwise enter the attached preliminary amendment before calculating the filing fee. (At least one original independent claim must be retained for filing purposes).
- ☒ The inventor(s) of the invention being claimed in this application is(are): Daniel Hoo, Brian James Gingras, Paul Kerner Pauling, Clayton Taylor Gann, Robert Eugene Krautkramer, James Monroe Perkins, Anthony Mark Gambaro, Robert Alvin Barkhau, Andrew Peter Doyle, James Leo Baggot, Joe Cwiakala, Valter Di Nardo, Massimiliano Adalberti, Stephano Petri, Guilio Betti.
- ☐ This application is being filed by less than all the inventors named in the prior application. In accordance with 37 CFR 1.63(d)(2), the Commissioner is requested to delete the name(s) of the following person or persons who are not inventors of the invention being claimed in this application: _____.

Rev. Oct.-01

10. ☐ Amend the specification by inserting before the first line the sentence: "This application is a ☐ continuation ☐ division of application number _____, filed _____, (pending), which is hereby incorporated by reference herein."
11. ☒ New formal drawings are enclosed.
12. ☐ Priority of foreign application number _____, filed on _____ in _____ is claimed under 35 U.S.C. 119.
☐ The certified copy has been filed in prior application number _____, filed _____
13. ☒ A preliminary amendment is enclosed.
14. ☒ The prior application is assigned of record to Kimberly Clark Worldwide, Inc..
15. ☒ Also enclosed: Return Postcard.
16. ☐ The power of attorney in the prior application is to: _____ and other attorneys at the firm of BRINKS HOFER GILSON & LIONE.
- a. ☐ The power appears in the original papers in the prior application.
- b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. ☒ Address all future correspondence to: (may only be completed by applicant, or attorney or agent of record.)

9/17/03
Date

Andrew D. Stover
BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, IL 60610
(312)321-4200

Jonathan P. Taylor
Signature
Name: Jonathan P. Taylor, Ph.D.
Reg. No. 48,338

- ☐ Inventor(s)
☐ Assignee of complete interest
☐ Attorney or agent of record
☒ Filed under 37 CFR 1.34(a)
Registration Number if acting under 37 CFR 1.34(a): 48,338.



"Express Mail" mailing label number EL 835293200 US

Date of Deposit: September 17, 2003

Our Case No. 659/1770

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	
)	
Daniel Hoo et al.)	
)	Examiner
Serial No. --)	--
)	
Filing Date: September 17, 2003)	
)	
For WET ROLL HAVING UNIFORM)	Group Art Unit No. --
COMPOSITION DISTRIBUTION)	

SUBMISSION OF FORMAL DRAWINGS


Mail Stop Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-4150

Dear Sir:

As part of the filing of this Divisional Patent Application, enclosed herewith are ten (10) sheets of formal drawings (Figures 1-15).

Respectfully submitted,

9/17/03


Jonathan P. Taylor, Ph.D.
Registration No. 48,338
Agent for Applicant

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200

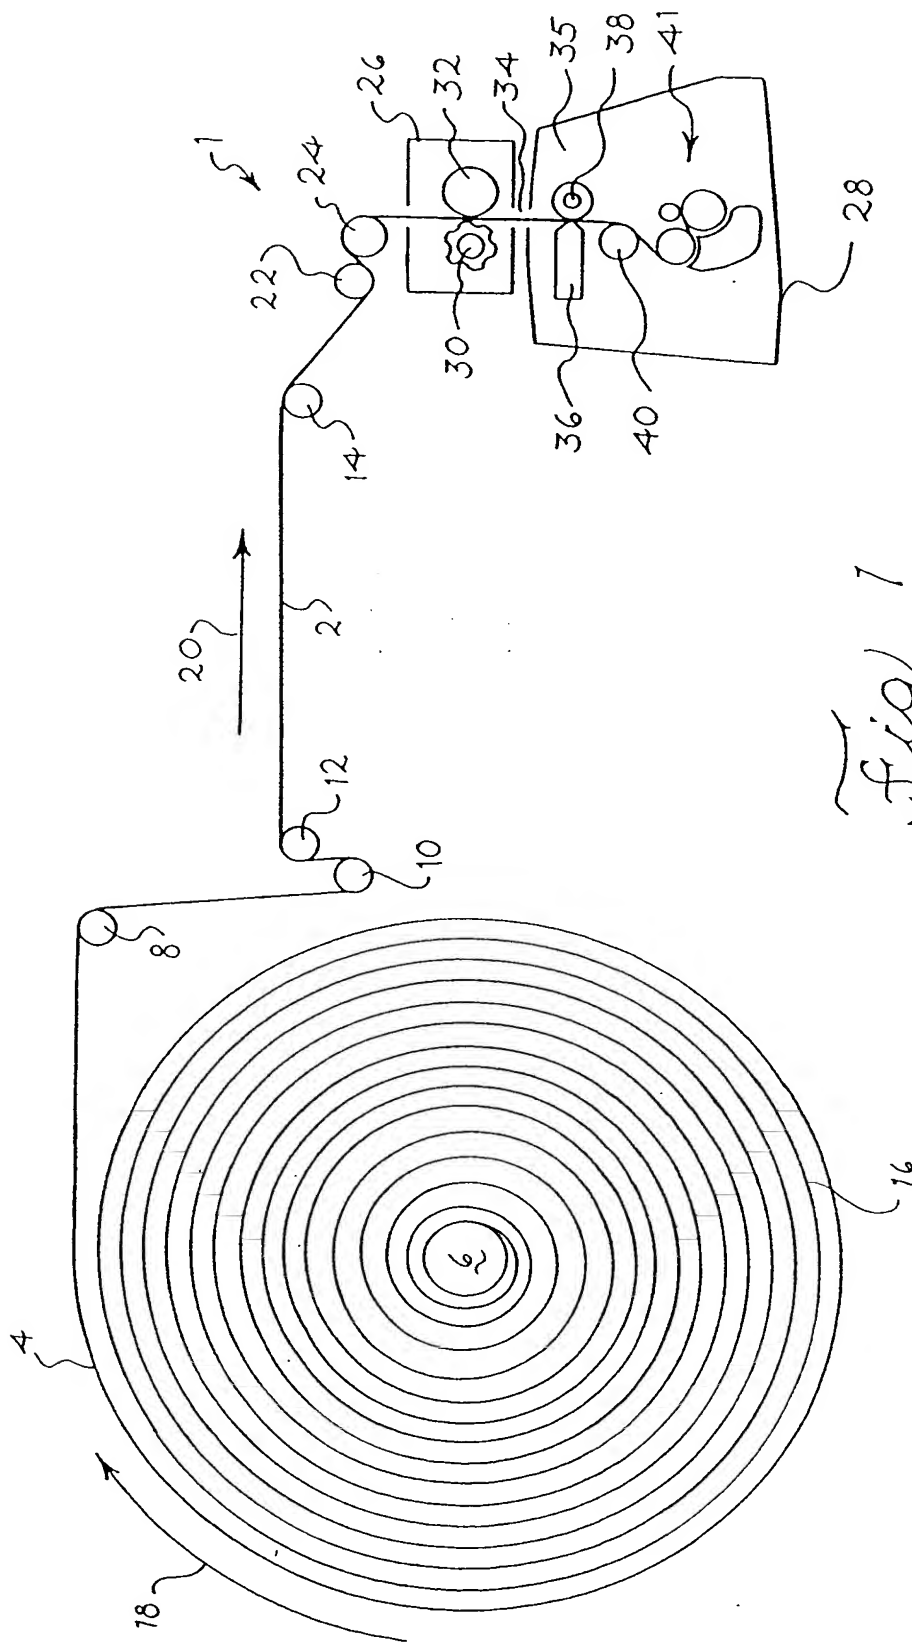


Fig. 1

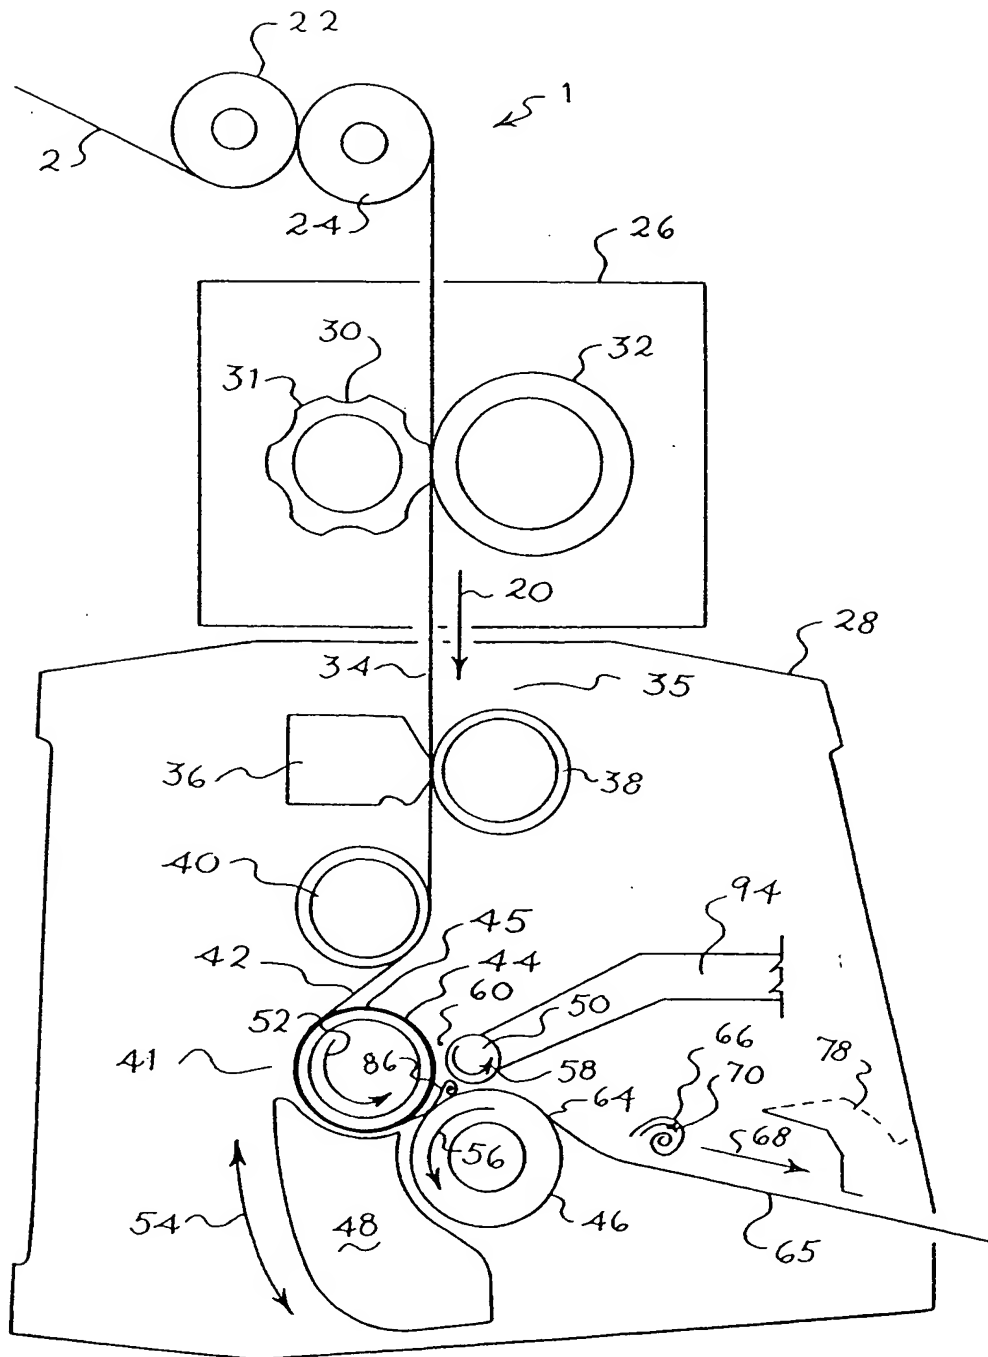


Fig. 2

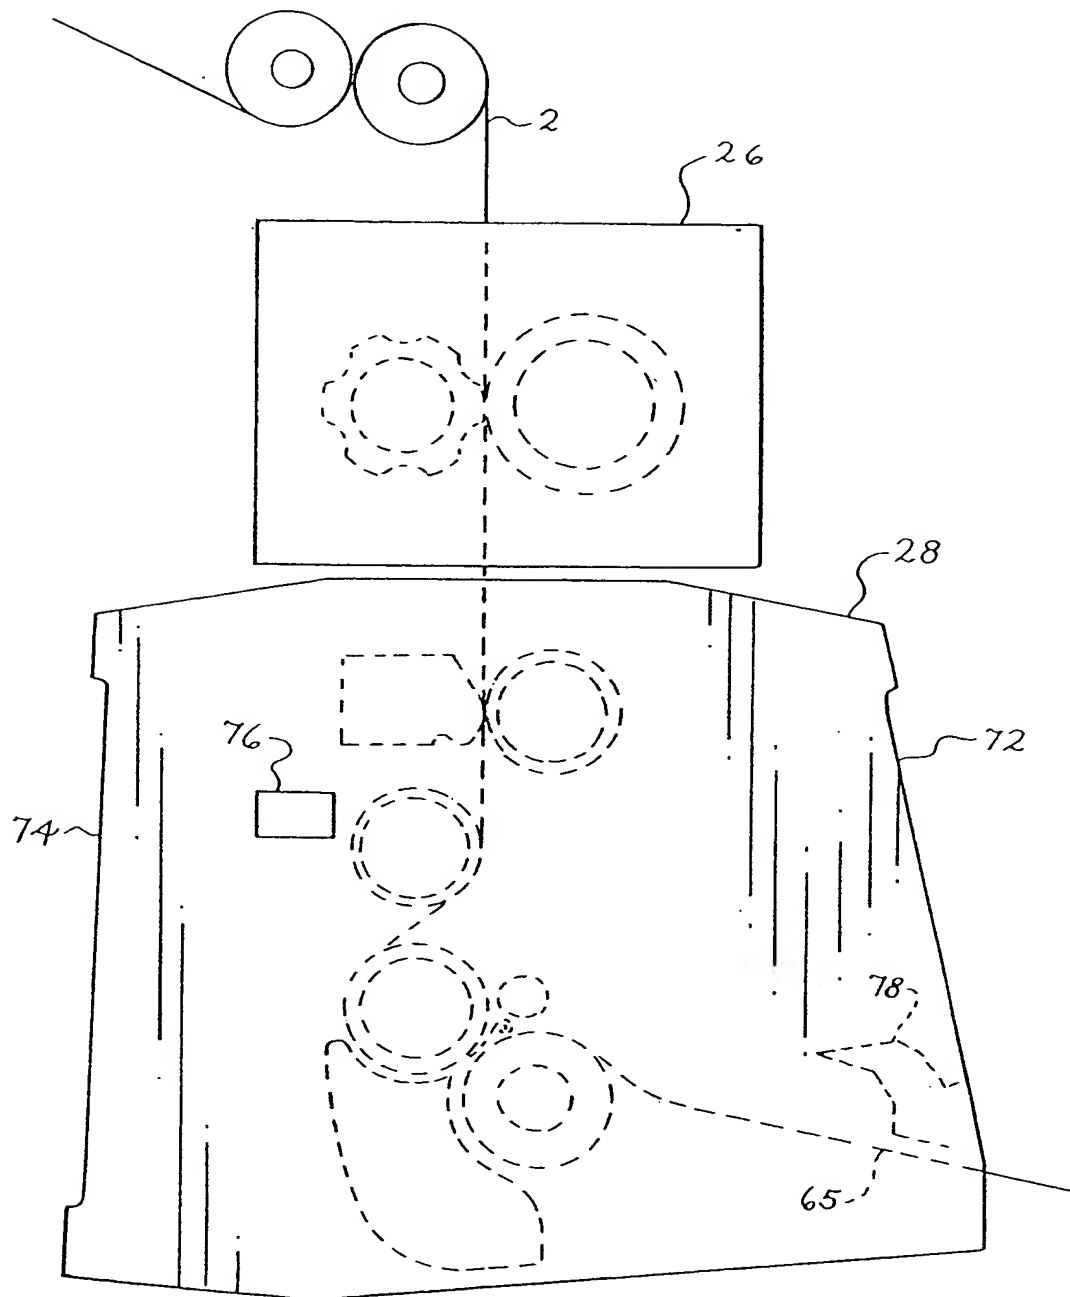


Fig. 3

Fig. 7

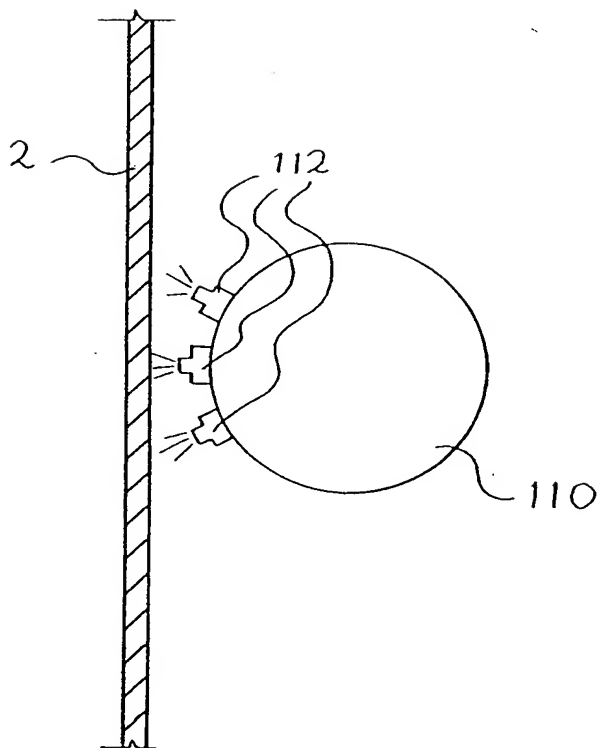
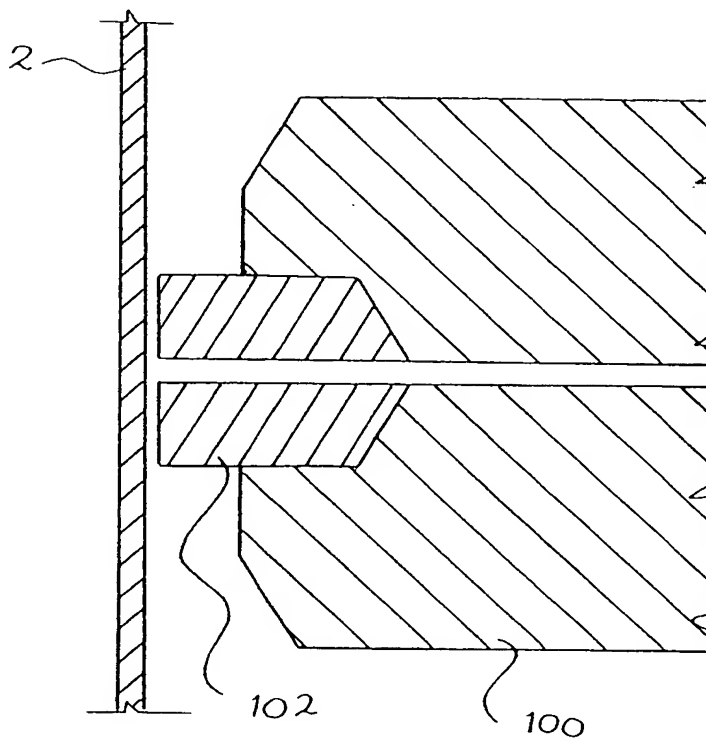
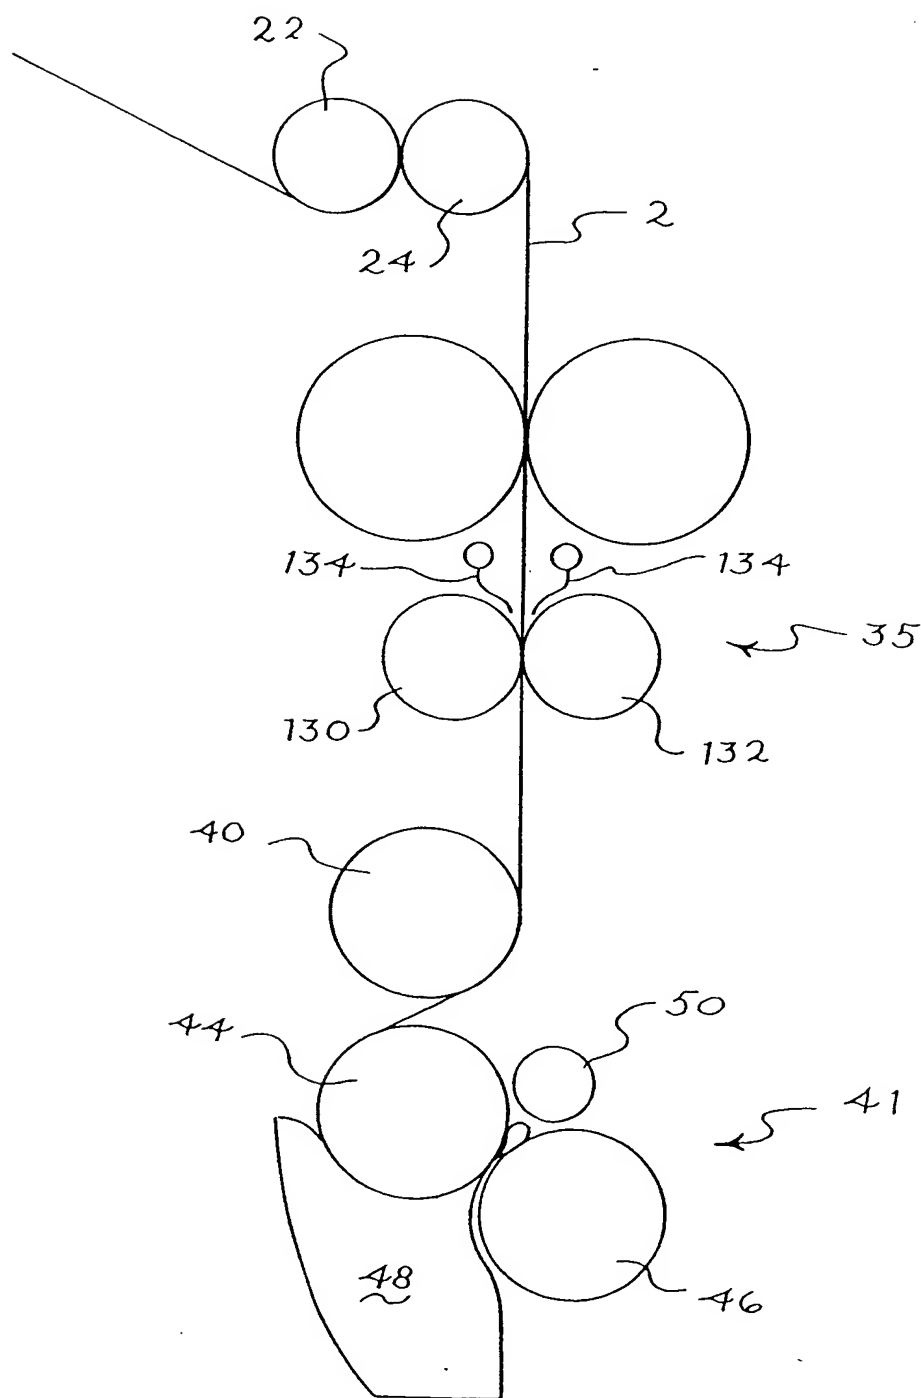


Fig. 5

Fig. 6



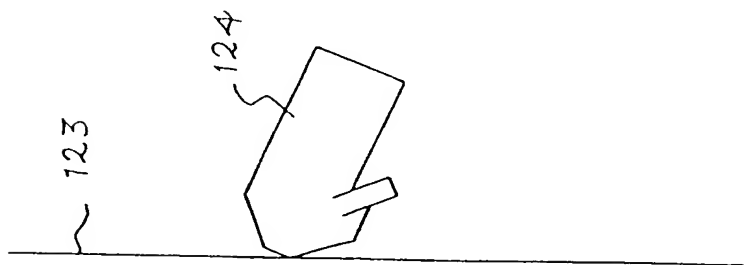


Fig. 7

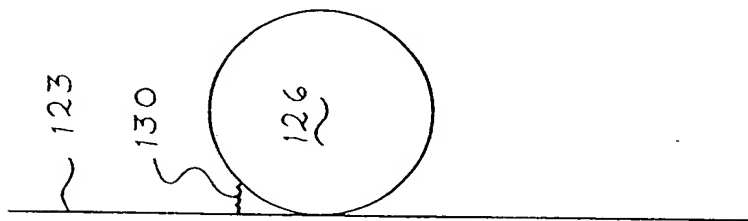


Fig. 8

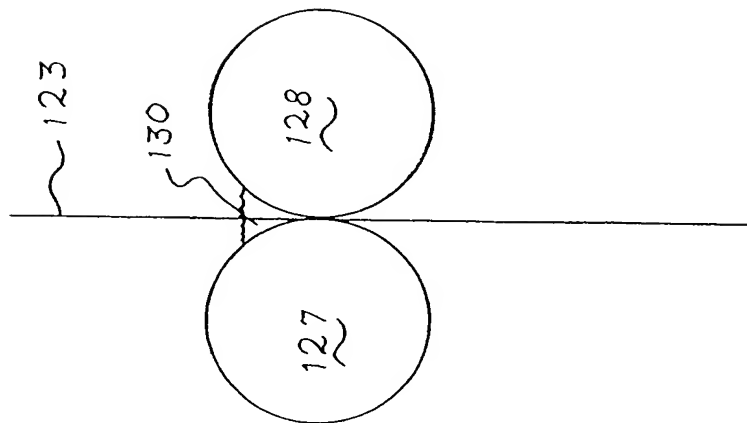


Fig. 9

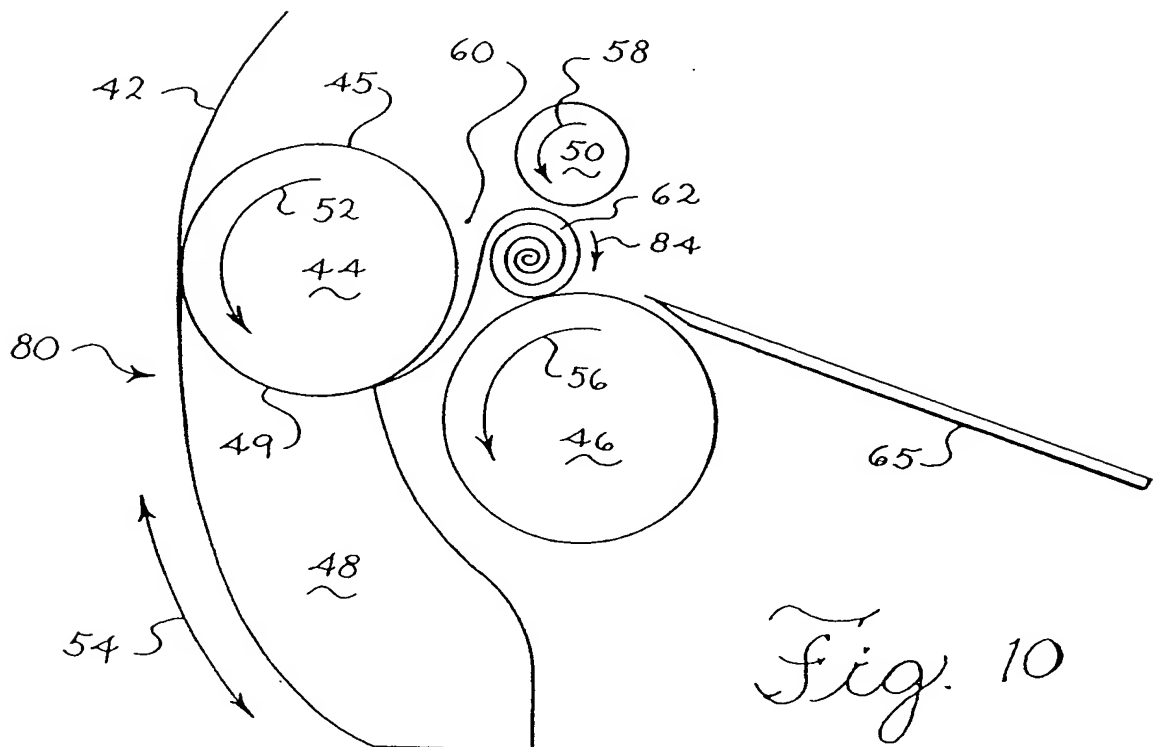


Fig. 10

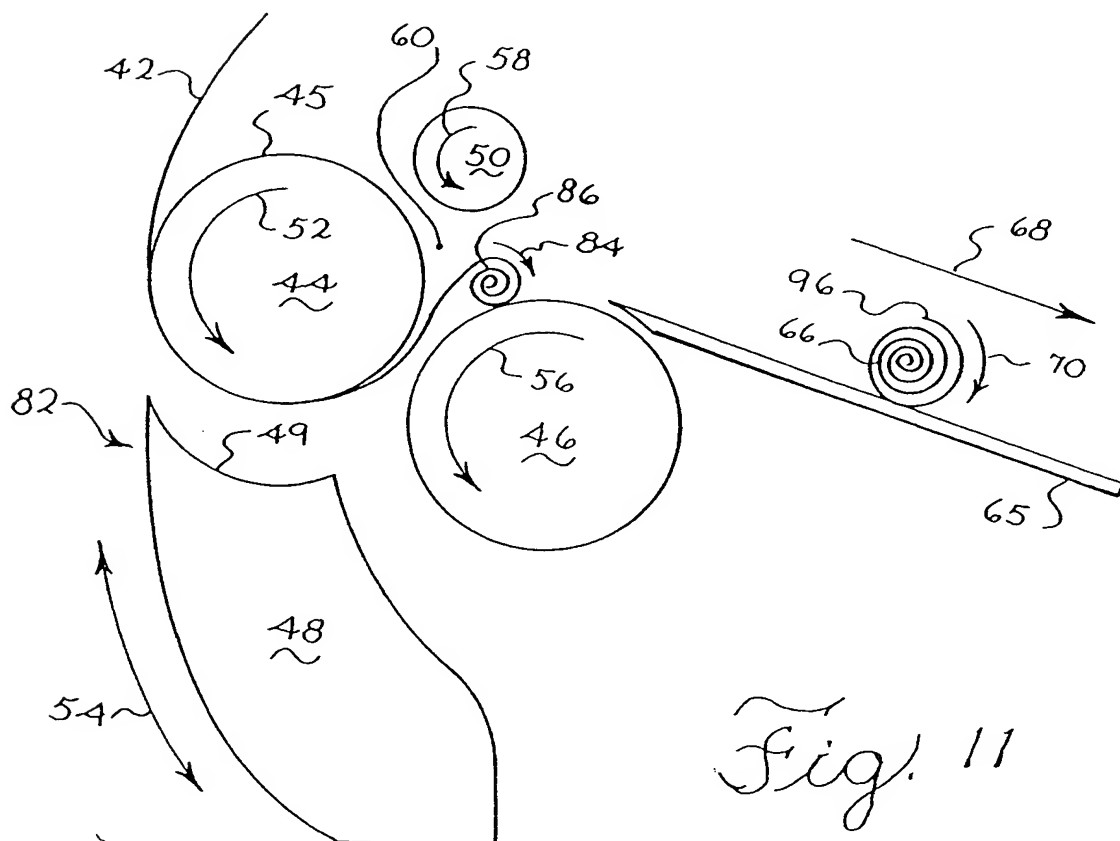


Fig. 11

Fig. 12

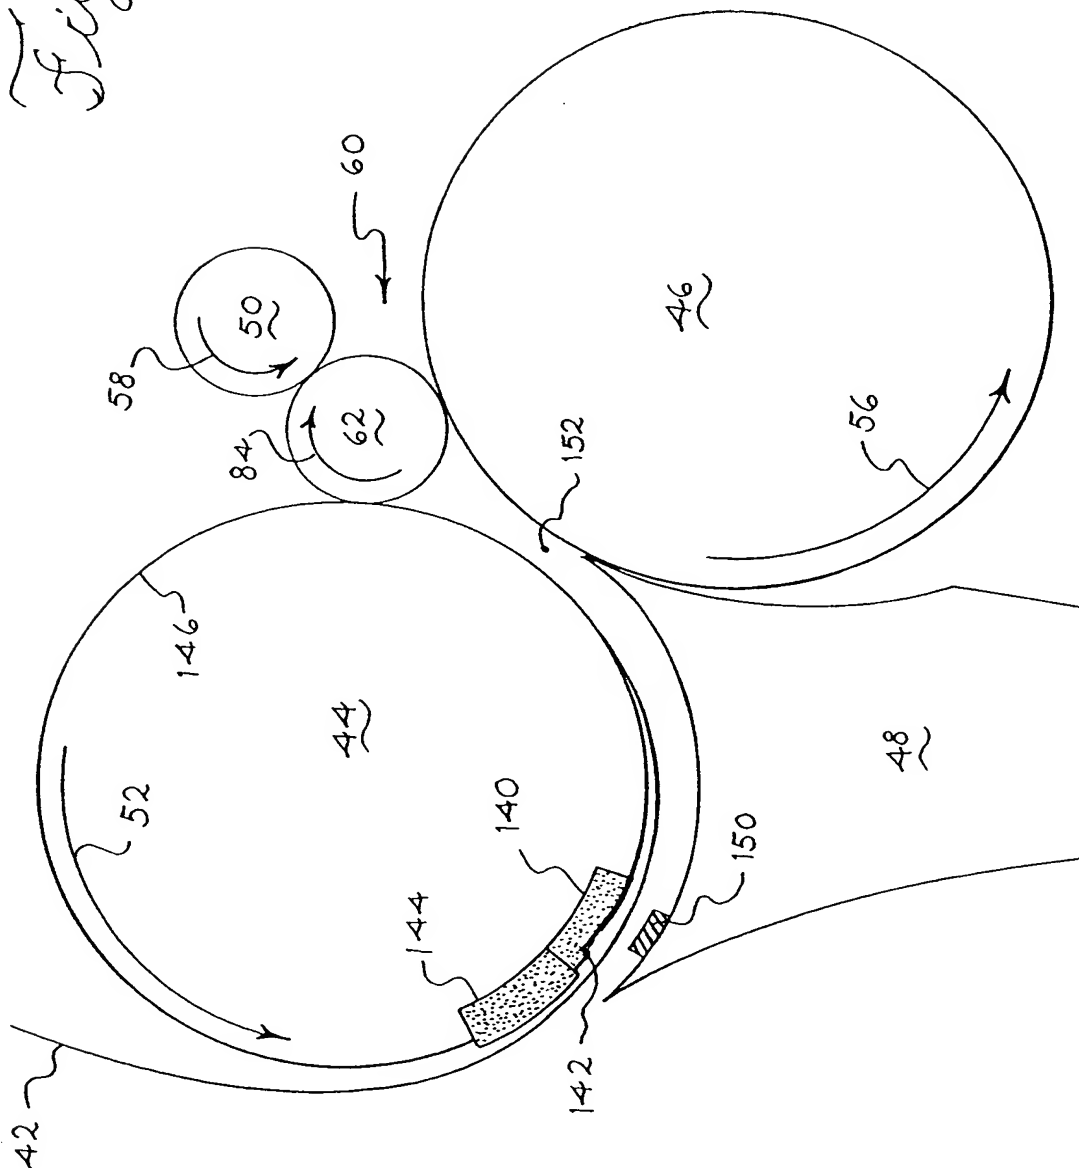
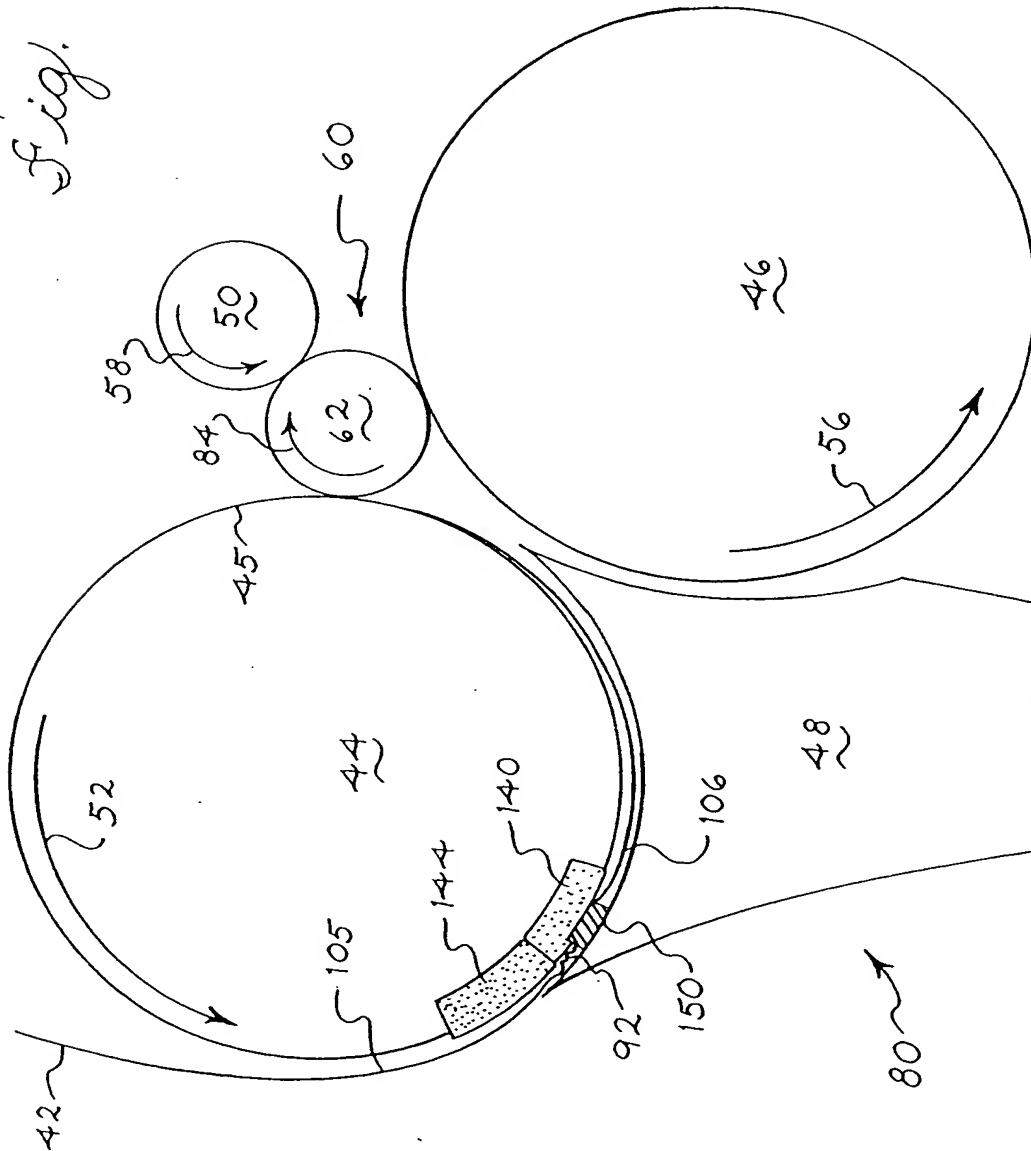


Fig. 13



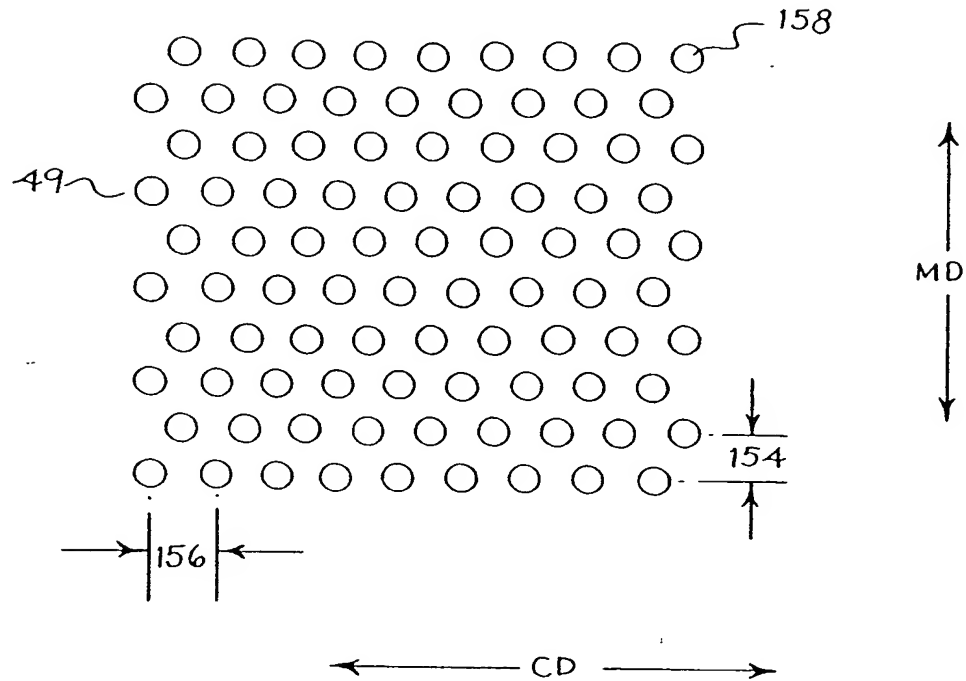


Fig. 14

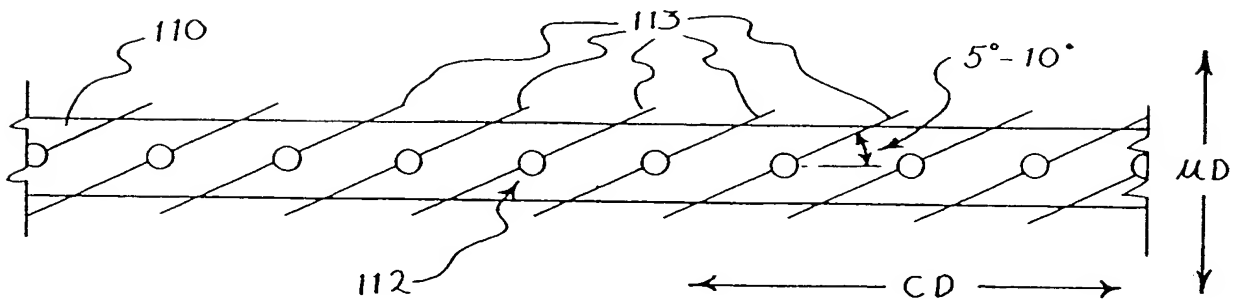


Fig. 15

Case No. 659/869DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION, the specification of which:

- ☐ is attached hereto.
☒ was filed on July 6, 2001 as Application Serial No. 09/900,516.
☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
----------	-----------	------------------------	------------------------------	-----------------------------

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)	(Filing Date)
--------------------------	---------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
--------------------------	---------------	---------------------------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature

Full name of sole or first inventor

Residence

Citizenship

Post Office Address

Daniel HooDate: 13 Nov 2001Appleton, WisconsinUnited StatesW2820 Crestwood Ct, Appleton, Wisconsin 54913125 E. Wayfarer LaneBRINKS HOFER GILSON & LIONEP.O. Box 10395Chicago, IL 60610(312) 321-4200

Case No. 659/869

Inventor's Signature
Full name of second joint inventor
Residence
Citizenship
Post Office Address

Brian James Gingras Date: 15 Nov. 2001
Brian James Gingras
Appleton, Wisconsin
United States
W6016 Moonflower Drive, Appleton, Wisconsin, 54915

Inventor's Signature
Full name of third joint inventor
Residence
Citizenship
Post Office Address

Paul Kerner Pauling Date: 12 Nov 2001
Paul Kerner Pauling
Appleton, Wisconsin
United States
2008 Twin Willows Drive, Appleton, Wisconsin, 54914

Inventor's Signature
Full name of fourth joint inventor
Residence
Citizenship
Post Office Address

Clayton Taylor Gahn Date: 15 Nov. 2001
Clayton Taylor Gahn
~~Kaukauna, Wisconsin APPLETON~~ CG.
United States W2820 CRESTWOOD CT.
~~508 Ferncliff Drive, Kaukauna, Wisconsin, 54130~~ APPLETON, WI 54915

Inventor's Signature
Full name of fifth joint inventor
Residence
Citizenship
Post Office Address

Robert Eugene Krautkramer Date: 9 Nov 2001
Robert Eugene Krautkramer
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of sixth joint inventor
Residence
Citizenship
Post Office Address

James Monroe Perkins Date: 11-15-01
James Monroe Perkins
Appleton, Wisconsin
United States
829 E. Windfield Place, Appleton, Wisconsin, 54911

Inventor's Signature
Full name of seventh joint inventor
Residence
Citizenship
Post Office Address

Anthony Mark Gambaro Date: 9 Nov 2001
Anthony Mark Gambaro
Appleton, Wisconsin
United States
401 E. Fernwood Lane, Appleton, Wisconsin, 54913

Inventor's Signature
Full name of eighth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Robert Alvin Barkhau
Aiken, South Carolina
United States
333 Northwood Drive, Aiken, South Carolina 29803

Inventor's Signature
Full name of ninth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Andrew Peter Doyle
Martinez, Georgia
United States
6112 Maness Ct., Martinez, Georgia 30907

Inventor's Signature
Full name of tenth joint inventor
Residence
Citizenship
Post Office Address

James Leo Baggot Date: 13 Nov. 2001
James Leo Baggot
Menasha, Wisconsin
United States
848 Nicolet Boulevard, Menasha, Wisconsin, 54952



Case No. 659/869

Inventor's Signature
Full name of eleventh joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Joe Cwiakala
Battlecreek, Michigan
United States
102 Shadow Bend Lane, Battlecreek, Michigan 59104

Inventor's Signature
Full name of twelfth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Valter Di Nardo
Segromigno In Monte, Italy
Italy
Via Per Valgiano n° 63/B, Segromigno In Monte 55018, Italy

Inventor's Signature
Full name of thirteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Massimiliano Adalberti
S. Maria Del Giudice, Italy
Italy
Via delle Piane n° 34/B, S. Maria Del Giudice 55058, Italy

Inventor's Signature
Full name of fourteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Stephano Petri
S. Anna, Italy
Italy
Via di Boboli n° 9/C, S. Anna 55100, Italy

Inventor's Signature
Full name of fifteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Guilio Betti
Guamo, Italy
Italy
Via di Piaggia n° 8 Vorno, Guamo 55060, Italy

Case No. 659/869**DECLARATION FOR PATENT APPLICATION**

I, the named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION, the specification of which:

- ☐ is attached hereto.
- ☒ was filed on July 6, 2001 as Application Serial No. 09/900,516.
- ☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:				

(Application Serial No.)	(Filing Date)
I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:	

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.		

Inventor's Signature

Full name of sole or first inventor

Residence

Citizenship

Post Office Address

Daniel HooAppleton, WisconsinUnited StatesW2820 Crestwood Ct, Appleton, Wisconsin 54913125 E. Wayfarer LaneBRINKS HOFER GILSON & LIONEP.O. Box 10395Chicago, IL 60610(312) 321-4200Date: 13 NOV 2001

DH



Case No. 659/869

Inventor's Signature
Full name of second joint inventor
Residence
Citizenship
Post Office Address

Brian James Gingras Date: 15 Nov. 2001
Brian James Gingras
Appleton, Wisconsin
United States
W6016 Moonflower Drive, Appleton, Wisconsin, 54915

Inventor's Signature
Full name of third joint inventor
Residence
Citizenship
Post Office Address

Paul Kerner Pauling Date: 12 Nov 2001
Paul Kerner Pauling
Appleton, Wisconsin
United States
2008 Twin Willows Drive, Appleton, Wisconsin, 54914

Inventor's Signature
Full name of fourth joint inventor
Residence
Citizenship
Post Office Address

Clayton Taylor Gahn Date: 15 Nov. 2001
Clayton Taylor Gahn
~~Kaukauna, Wisconsin~~ APPLETON WI
United States
~~508 Ferncliff Drive, Kaukauna, Wisconsin, 54130~~ W 2820 CRESTWOOD CT. APPLETON, WI 54915

Inventor's Signature
Full name of fifth joint inventor
Residence
Citizenship
Post Office Address

Robert Eugene Krantkramer Date: 9 Nov 2001
Robert Eugene Krantkramer
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of sixth joint inventor
Residence
Citizenship
Post Office Address

James Monroe Perkins Date: 11-15-01
James Monroe Perkins
Appleton, Wisconsin
United States
829 E. Windfield Place, Appleton, Wisconsin, 54911

Inventor's Signature
Full name of seventh joint inventor
Residence
Citizenship
Post Office Address

Anthony Mark Gambaro Date: 9 Nov 2001
Anthony Mark Gambaro
Appleton, Wisconsin
United States
401 E. Fernwood Lane, Appleton, Wisconsin, 54913

Inventor's Signature
Full name of eighth joint inventor
Residence
Citizenship
Post Office Address

Robert Alvin Barkhau Date: 14 Nov 2001
Robert Alvin Barkhau
Aiken, South Carolina
United States
333 Northwood Drive, Aiken, South Carolina 29803

Inventor's Signature
Full name of ninth joint inventor
Residence
Citizenship
Post Office Address

Andrew Peter Doyle Date: 16 Nov 2001
Andrew Peter Doyle
Marinez, Georgia
United States
6112 Maness Ct., Martinez, Georgia 30907

Inventor's Signature
Full name of tenth joint inventor
Residence
Citizenship
Post Office Address

James Leo Baggot Date: 13 Nov. 2001
James Leo Baggot
Menasha, Wisconsin
United States
848 Nicolet Boulevard, Menasha, Wisconsin, 54952



Case No. 659/869

Inventor's Signature
Full name of eleventh joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Joe Cwiakala
Battlecreek, Michigan
United States
102 Shadow Bend Lane, Battlecreek, Michigan 59104

Inventor's Signature
Full name of twelfth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Valter Di Nardo
Segromigno In Monte, Italy
Italy
Via Per Valgiano n° 63/B, Segromigno In Monte 55018, Italy

Inventor's Signature
Full name of thirteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Massimiliano Adalberti
S. Maria Del Giudice, Italy
Italy
Via delle Piane n° 34/B, S. Maria Del Giudice 55058, Italy

Inventor's Signature
Full name of fourteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Stephano Petri
S. Anna, Italy
Italy
Via di Boboli n° 9/C, S. Anna 55100, Italy

Inventor's Signature
Full name of fifteenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Guilio Betti
Guamo, Italy
Italy
Via di Piaggia n° 8 Vorno, Guamo 55060, Italy



Case No. 659/869

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION, the specification of which:

- ☐ is attached hereto.
- ☒ was filed on July 6, 2001 as Application Serial No. 09/900,516.
- ☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature	_____	Date: _____
Full name of sole or first inventor	<u>Daniel Hoo</u>	
Residence	<u>Appleton, Wisconsin</u>	
Citizenship	<u>United States</u>	
Post Office Address	<u>W2820 Crestwood Ct., Appleton, Wisconsin 54913</u>	

BRINKS HOFER GILSON & LIONE
P.O. Box 10395
Chicago, IL 60610
(312) 321-4200



Case No. 659/869

Inventor's Signature
Full name of second joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Brian James Gingras
Appleton, Wisconsin
United States
W6016 Moonflower Drive, Appleton, Wisconsin, 54915

Inventor's Signature
Full name of third joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Paul Kerner Pauling
Appleton, Wisconsin
United States
2008 Twin Willows Drive, Appleton, Wisconsin, 54914

Inventor's Signature
Full name of fourth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Clayton Taylor Gann
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of fifth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Robert Eugene Krautkramer
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of sixth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
James Monroe Perkins
Appleton, Wisconsin
United States
829 E. Windfield Place, Appleton, Wisconsin, 54911

Inventor's Signature
Full name of seventh joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Anthony Mark Gambaro
Appleton, Wisconsin
United States
401 E. Fernwood Lane, Appleton, Wisconsin, 54913

Inventor's Signature
Full name of eighth joint inventor
Residence
Citizenship
Post Office Address


Date: _____
Robert Alvin Barkhau
Aiken, South Carolina
United States
333 Northwood Drive, Aiken, South Carolina 29803

Inventor's Signature
Full name of ninth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Andrew Peter Doyle
Marinez, Georgia
United States
6112 Maness Ct., Martinez, Georgia 30907

Inventor's Signature
Full name of tenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
James Leo Baggot
Menasha, Wisconsin
United States
848 Nicolet Boulevard, Menasha, Wisconsin, 54952



Case No. 659/869

Date: November 3, 2001

Inventor's Signature
Full name of eleventh joint inventor
Residence
Citizenship
Post Office Address

Joe Cwiakala
Joe Cwiakala
Battlecreek, Michigan
United States
102 Shadow Bend Lane, Battlecreek, Michigan 59104

Date: _____

Inventor's Signature
Full name of twelfth joint inventor
Residence
Citizenship
Post Office Address

Valter Di Nardo
Segromigno In Monte, Italy
Italy
Via Per Valgiano n° 63/B, Segromigno In Monte 55018, Italy

Date: _____

Inventor's Signature
Full name of thirteenth joint inventor
Residence
Citizenship
Post Office Address

Massimiliano Adalberti
S. Maria Del Giudice, Italy
Italy
Via delle Piane n° 34/B, S. Maria Del Giudice 55058, Italy

Date: _____

Inventor's Signature
Full name of fourteenth joint inventor
Residence
Citizenship
Post Office Address

Stephano Petri
S. Anna, Italy
Italy
Via di Boboli n° 9/C, S. Anna 55100, Italy

Date: _____

Inventor's Signature
Full name of fifteenth joint inventor
Residence
Citizenship
Post Office Address

Guilio Betti
Guamo, Italy
Italy
Via di Piaggia n° 8 Vorno, Guamo 55060, Italy

Case No. 659/869**DECLARATION FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION, the specification of which:

- ☐ is attached hereto.
- ☒ was filed on July 6, 2001 as Application Serial No. 09/900,516.
- ☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<input type="checkbox"/> Yes	<input type="checkbox"/> No
-----------------	------------------	-------------------------------	------------------------------	-----------------------------

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

<u>(Application Serial No.)</u>	<u>(Filing Date)</u>
---------------------------------	----------------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Serial No.)</u>	<u>(Filing Date)</u>	<u>(Status-patented, pending, abandoned)</u>
---------------------------------	----------------------	--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature

Date:

Full name of sole or first inventor

Daniel Hoo

Residence

Appleton, Wisconsin

Citizenship

United States

Post Office Address


W2820 Crestwood Ct., Appleton, Wisconsin 54913

BRINKS HOFER GILSON & LIONE

P.O. Box 10395

Chicago, IL 60610

(312) 321-4200



Case No. 659/869

Inventor's Signature
Full name of second joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Brian James Gingras
Appleton, Wisconsin
United States
W6016 Moonflower Drive, Appleton, Wisconsin, 54915

Inventor's Signature
Full name of third joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Paul Kerner Pauling
Appleton, Wisconsin
United States
2008 Twin Willows Drive, Appleton, Wisconsin, 54914

Inventor's Signature
Full name of fourth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Clayton Taylor Gann
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of fifth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Robert Eugene Krautkramer
Kaukauna, Wisconsin
United States
508 Ferncliff Drive, Kaukauna, Wisconsin, 54130

Inventor's Signature
Full name of sixth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
James Monroe Perkins
Appleton, Wisconsin
United States
829 E. Windfield Place, Appleton, Wisconsin, 54911

Inventor's Signature
Full name of seventh joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Anthony Mark Gambaro
Appleton, Wisconsin
United States
401 E. Fernwood Lane, Appleton, Wisconsin, 54913

Inventor's Signature
Full name of eighth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Robert Alvin Barkhau
Aiken, South Carolina
United States
333 Northwood Drive, Aiken, South Carolina 29803

Inventor's Signature
Full name of ninth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
Andrew Peter Doyle
Marinez, Georgia
United States
6112 Maness Ct., Martinez, Georgia 30907

Inventor's Signature
Full name of tenth joint inventor
Residence
Citizenship
Post Office Address

Date: _____
James Leo Baggot
Menasha, Wisconsin
United States
848 Nicolet Boulevard, Menasha, Wisconsin, 54952



Case No. 659/869

Inventor's Signature
Full name of eleventh joint inventor
Residence
Citizenship
Post Office Address

Joe Cwiakala

Battlecreek, Michigan

United States

102 Shadow Bend Lane, Battlecreek, Michigan 59104

Date: _____

Inventor's Signature
Full name of twelfth joint inventor
Residence
Citizenship
Post Office Address

Valter Di Nardo

Valter Di Nardo

Segromigno in Monte, Italy

Italy

Via per Valgiano n° 63/B, Segromigno in Monte 55018, Italy

Date: November 12, 2001

Inventor's Signature
Full name of thirteenth joint inventor
Residence
Citizenship
Post Office Address

Massimiliano Adalberti

Massimiliano Adalberti

S. Maria del Giudice, Italy

Italy

Via delle Piane n° 34/B, S. Maria del Giudice 55058, Italy

Date: November 12, 2001

Inventor's Signature
Full name of fourteenth joint inventor
Residence
Citizenship
Post Office Address

Stefano Petri

Stefano Petri

S. Anna, Italy

Italy

Via di Boboli n° 9/C, S. Anna 55100, Italy

Date: November 12, 2001

Inventor's Signature
Full name of fifteenth joint inventor
Residence
Citizenship
Post Office Address

Giulio Betti

Giulio Betti

Capannori, Italy

Italy

Via di Piaggia n° 8 Vorno, Guamo 55060, Italy

Date: November 12, 2001



"Express Mail" mailing label number EL 835293200 US

Date of Deposit: September 17, 2003

Our Case No.: 659/1770

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Daniel Hoo et al.

Serial No.: --

Filing Date: September 17, 2003

For: WET ROLL HAVING UNIFORM
COMPOSITION DISTRIBUTION

Examiner: --

Group Art Unit No.: --

INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents
Alexandria, VA 22313-1450

Dear Sir:

In compliance with the duty of disclosure under 37 C.F.R. § 1.56, it is respectfully requested that this Information Disclosure Statement be entered and the documents listed below and on the attached Form PTO-1449 be considered by the Examiner and made of record. Copies of the listed documents required by 37 C.F.R. § 1.98(a)(2) are enclosed for the convenience of the Examiner.

The references now cited are the following:

U.S. PATENTS

DOCUMENT NUMBER	DATE	NAME
257,761	05/09/1882	J. H. Ridgway
258,895	06/06/1882	J. & J. M. Crawshaw
273,198	02/27/1883	H. W. Vaughan
395,645	01/01/1889	J. B. Anderson
1,195,888	08/22/1916	H. M. Wheelwright
1,235,183	07/31/1917	A. Butterworth
1,302,352	04/29/1919	H. M. French
1,316,782	09/23/1919	D. D. Frothingham et al.
1,558,271	10/20/1925	L. S. Newell
1,901,080	03/14/1933	D. B. Bradner
1,956,561	05/01/1934	F. Coates
2,025,375	12/24/1935	J. A. Cameron et al.
2,054,113	09/15/1936	Abrahms et al.
2,059,881	11/03/1936	G. T. Lane
2,066,780	01/05/1937	D. S. Holt
2,119,480	05/31/1938	P. W. Codwise
2,186,957	01/16/1940	William R. Collings et al.
2,251,295	08/05/1941	H. A. Sheesley
2,257,113	09/30/1941	W. George
2,321,938	06/15/1943	R. G. Quinn
2,333,629	11/09/1943	W. E. Beadle, Sr.
2,361,082	10/24/1944	N. J. Brown
2,556,262	06/12/1951	Harry W. Faeber
2,562,457	07/31/1951	R. S. E. Hannay et al.
3,019,130	01/30/1962	L. Hornbostel
3,066,046	11/27/1962	R. R. Walton
3,668,905	06/13/1972	Schlunke
3,097,968	07/16/1963	C. F. Schaefer
3,766,756	10/23/1973	Farrar
3,776,482	12/04/1973	Mras
3,776,763	12/04/1973	Ross
3,797,281	03/19/1974	Norton
3,830,143	08/20/1974	Dowd, Jr.
3,844,813	10/29/1974	Leonard et al.
3,853,279	12/10/1974	Gerstein
3,856,226	12/24/1974	Dowd, Jr.
3,873,025	03/25/1975	Qvarnstrom
3,906,893	09/23/1975	Scales
3,949,035	04/06/1976	Dunning et al.
3,980,043	09/14/1976	Pomper
4,045,598	08/30/1977	Henson
4,108,110	08/22/1978	Berry

DOCUMENT NUMBER	DATE	NAME
4,213,218	07/22/1980	Winch
4,247,362	01/27/1981	Williams
4,257,343	03/24/1981	Kullander
4,259,924	04/07/1981	Smith
4,338,876	07/13/1982	Norton
4,447,924	05/15/1984	Bolton et al.
4,485,980	12/04/1984	Gorner
4,487,377	12/11/1984	Perini
4,533,435	08/06/1985	Intili
4,556,464	12/03/1985	Dahl et al.
4,565,155	01/21/1986	Koski
4,583,698	04/22/1986	Nistri et al.
4,590,099	05/20/1986	Reith
4,601,256	07/22/1986	Poterala
4,601,938	07/22/1986	Deacon et al.
4,649,695	03/17/1987	Crouch et al.
4,695,005	09/22/1987	Gietman, Jr.
4,723,724	02/09/1988	Bradley
4,741,944	05/03/1988	Jackson et al.
4,790,491	12/13/1988	Mundus et al.
4,803,194	02/07/1989	Bracewell
4,807,825	02/28/1989	Eisner et al.
4,856,725	08/15/1989	Bradley
4,865,221	09/12/1989	Jackson et al.
4,929,474	05/29/1990	Avni et al.
4,962,897	10/16/1990	Bradley
5,049,440	09/17/1991	Bornhoeft, III et al.
5,076,424	12/31/1991	Nakamura
5,089,296	02/18/1992	Bafford et al.
5,104,055	04/14/1992	Buxton
5,137,225	08/11/1992	Biagiotti
5,152,121	10/06/1992	Nakamura
5,152,471	10/06/1992	Goerner
5,201,164	04/13/1993	Kaufman
5,243,841	09/14/1993	Fleissner
5,271,575	12/21/1993	Weinert
5,275,348	01/04/1994	Looser
5,304,391	04/19/1994	Rantanen
5,314,119	05/24/1994	Watt
5,389,148	02/14/1995	Matsunaga
5,401,315	03/28/1995	Salo et al.
5,402,960	04/04/1995	Oliver et al.
5,449,328	09/12/1995	Schmidt et al.
5,478,027	12/26/1995	Alexander, III
5,501,775	03/26/1996	Kotitschke et al.
5,509,161	04/23/1996	Neveu et al.

DOCUMENT NUMBER	DATE	NAME
5,527,255	06/18/1996	Mansfield
5,538,199	07/23/1996	Biagiotti
5,540,332	07/30/1996	Kopacz et al.
5,542,622	08/06/1996	Biagiotti
5,545,295	08/13/1996	Fujita et al.
5,578,124	11/26/1996	Cleveland et al.
5,603,467	02/18/1997	Perini et al.
5,639,046	06/17/1997	Biagiotti
5,660,349	08/26/1997	Miller et al.
5,648,083	07/15/1997	Blieszner et al.
5,690,296	11/25/1997	Biagiotti
5,759,339	06/02/1998	Hartman
5,839,680	11/24/1998	Biagiotti
5,848,756	12/15/1998	Sollinger et al.
5,913,905	06/22/1999	Fleissner
5,958,187	09/28/1999	Bhat et al.
6,056,229	05/02/2000	Blume et al.
6,140,551	10/31/2000	Niemeyer et al.
6,228,216 B1	05/08/2001	Lindsay et al.
6,248,211 B1	06/19/2001	Jennings et al.
6,444,214 B1	09/03/2002	Cole et al.

FOREIGN PATENTS

DOCUMENT NUMBER	DATE	COUNTRY
EP 0 014 520 A1	08/20/1980	EPO
EP 0 014 520 B1	08/20/1980	EPO
EP 0 026 091 A1	04/01/1981	EPO
EP 0 026 091 B1	04/01/1981	EPO
EP 0 256 950 A1	02/24/1988	EPO
EP 0 641 885 A1	03/08/1995	EPO
EP 0 895 956 A1	02/10/1999	EPO
JP 2-91300	03/30/1990	Japan
JP 5-209395	08/20/1993	Japan
EP 0 580 561 A2	01/26/1994	EPO
JP 6-306793	11/01/1994	Japan
WO 98/03713	01/29/1998	WIPO
JP 10174670	06/30/1998	Japan
WO 99/29958	06/17/1999	WIPO
WO 99/33623	07/08/1999	WIPO
WO 01/40090 A2	06/07/2001	WIPO
WO 01/82986 A2	11/08/2001	WIPO

NON-PATENT REFERENCES

SINCRO Brochure, FABIO PERINI, S.p.A., 9 pages
Copy of International Search Report from corresponding PCT application No. PCT/US01/20216, dated 10/07/02, 3 pages.
Copy of Partial International Search Report from PCT application No. PCT/US01/21030, dated 10/28/02, 3 pages.
Search Report for Patent Cooperation Treaty application No. PCT/US02/21030, Date of Mailing 02/21/2003, 6 pages.

In accordance with 37 C.F.R. § 1.97(g),(h), this Information Disclosure Statement is not to be construed as a representation that a search has been made and is not to be construed to be an admission that the information cited is, or is considered to be, material to patentability as defined in 37 C.F.R. § 1.56(b).

This Information Disclosure Statement is being filed prior to the receipt of the first Official Action reflecting an examination on the merits and hence is believed to be timely filed in accordance with 37 C.F.R. § 1.97(b). No fees are believed to be due in connection with filing of this Information Disclosure Statement, however, should any fees under 37 C.F.R. §§ 1.16 to 1.21 be deemed necessary for any reason relating to these material, the Commissioner is hereby authorized to deduct said fees from Brinks Hofer Gilson & Lione Deposit Account No. 23-1925. A duplicate copy of this document is enclosed.

This application is a divisional application of U.S. Serial No. 09/900,516, filed July 6, 2001 and is relied upon for an earlier filing dated under 35 U.S.C. § 120. In accordance with Rule 37 C.F.R. § 1.98(d) only copies of documents not previously cited


and submitted to the Patent and Trademark Office in the prior application Serial No.

09/900,516 are enclosed for the convenience of the Examiner.

Applicant(s) respectfully request that the listed documents be made of record in the present case.

Respectfully submitted,

9/17/03


Jonathan P. Taylor, Ph.D.
Registration No. 48,338
Agent for Applicant(s)

BRINKS HOFER GILSON & LIONE
P.O. Box 10395
Chicago, IL 60610
(312) 321-4200



FORM PTO-1449	SERIAL NO. not yet assigned	CASE NO. 659/1770
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	FILING DATE September 17, 2003	GROUP ART UNIT --
(use several sheets if necessary)	APPLICANT(S): Daniel Hoo et al.	

REFERENCE DESIGNATION U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS/ SUBCLASS	FILING DATE
	A1	257,761	05/09/1882	J. H. Ridgway		
	A2	258,895	06/06/1882	J. & J. M. Crawshaw		
	A3	273,198	02/27/1883	H. W. Vaughan		
	A4	395,645	01/01/1889	J. B. Anderson		
	A5	1,195,888	08/22/1916	H. M. Wheelwright		
	A6	1,235,183	07/31/1917	A. Butterworth		
	A7	1,302,352	04/29/1919	H. M. French		
	A8	1,316,782	09/23/1919	D. D. Frothingham et al.		
	A9	1,558,271	10/20/1925	L. S. Newell		
	A10	1,901,080	03/14/1933	D. B. Bradner		
	A11	1,956,561	05/01/1934	F. Coates		
	A12	2,025,375	12/24/1935	J. A. Cameron et al.		
	A13	2,054,113	09/15/1936	Abrahms et al.		
	A14	2,059,881	11/03/1936	G. T. Lane		
	A15	2,066,780	01/05/1937	D. S. Holt		
	A16	2,119,480	05/31/1938	P. W. Codwise		
	A17	2,186,957	01/16/1940	William R. Collings et al.		
	A18	2,251,295	08/05/1941	H. A. Sheesley		
	A19	2,257,113	09/30/1941	W. George		
	A20	2,321,938	06/15/1943	R. G. Quinn		
	A21	2,333,629	11/09/1943	W. E. Beadle, Sr.		
	A22	2,361,082	10/24/1944	N. J. Brown		
	A23	2,556,262	06/12/1951	Harry W. Faeber		
	A24	2,562,457	07/31/1951	R. S. E. Hannay et al.		
	A25	3,019,130	01/30/1962	L. Hornbostel		
	A26	3,066,046	11/27/1962	R. R. Walton		
	A27	3,668,905	06/13/1972	Schlunke		
	A28	3,097,968	07/16/1963	C. F. Schaefer		
	A29	3,766,756	10/23/1973	Farrar		
	A30	3,776,482	12/04/1973	Mras		
	A31	3,776,763	12/04/1973	Ross		
	A32	3,797,281	03/19/1974	Norton		
	A33	3,830,143	08/20/1974	Dowd, Jr.		

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

FORM PTO-1449	SERIAL NO. not yet assigned	CASE NO. 659/1770
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	FILING DATE September 17, 2003	GROUP ART UNIT --
(use several sheets if necessary)		APPLICANT(S): Daniel Hoo et al.

REFERENCE DESIGNATION U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS/ SUBCLASS	FILING DATE
	A34	3,844,813	10/29/1974	Leonard et al.		
	A35	3,853,279	12/10/1974	Gerstein		
	A36	3,856,226	12/24/1974	Dowd, Jr.		
	A37	3,873,025	03/25/1975	Qvarnstrom		
	A38	3,906,893	09/23/1975	Scales		
	A39	3,949,035	04/06/1976	Dunning et al.		
	A40	3,980,043	09/14/1976	Pomper		
	A41	4,045,598	08/30/1977	Henson		
	A42	4,108,110	08/22/1978	Berry		
	A43	4,213,218	07/22/1980	Winch		
	A44	4,247,362	01/27/1981	Williams		
	A45	4,257,343	03/24/1981	Kullander		
	A46	4,259,924	04/07/1981	Smith		
	A47	4,338,876	07/13/1982	Norton		
	A48	4,447,924	05/15/1984	Bolton et al.		
	A49	4,485,980	12/04/1984	Gorner		
	A50	4,487,377	12/11/1984	Perini		
	A51	4,533,435	08/06/1985	Intili		
	A52	4,556,464	12/03/1985	Dahl et al.		
	A53	4,565,155	01/21/1986	Koski		
	A54	4,583,698	04/22/1986	Nistri et al.		
	A55	4,590,099	05/20/1986	Reith		
	A56	4,601,256	07/22/1986	Poterale		
	A57	4,601,938	07/22/1986	Deacon et al.		
	A58	4,649,695	03/17/1987	Crouch et al.		
	A59	4,695,005	09/22/1987	Gietman, Jr.		
	A60	4,723,724	02/09/1988	Bradley		
	A61	4,741,944	05/03/1988	Jackson et al.		
	A62	4,790,491	12/13/1988	Mundus et al.		
	A63	4,803,194	02/07/1989	Bracewell		
	A64	4,807,825	02/28/1989	Eisner et al.		
	A65	4,856,725	08/15/1989	Bradley		
	A66	4,865,221	09/12/1989	Jackson et al.		
	A67	4,929,474	05/29/1990	Avni et al.		
	A68	4,962,897	10/16/1990	Bradley		

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

FORM PTO-1449	SERIAL NO. not yet assigned	CASE NO. 659/1770
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	FILING DATE September 17, 2003	GROUP ART UNIT --
(use several sheets if necessary)		APPLICANT(S): Daniel Hoo et al.

REFERENCE DESIGNATION U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS/ SUBCLASS	FILING DATE
	A69	5,049,440	09/17/1991	Bornhoeft, III et al.		
	A70	5,076,424	12/31/1991	Nakamura		
	A71	5,089,296	02/18/1992	Bafford et al.		
	A72	5,104,055	04/14/1992	Buxton		
	A73	5,137,225	08/11/1992	Biagiotti		
	A74	5,152,121	10/06/1992	Nakamura		
	A75	5,152,471	10/06/1992	Goerner		
	A76	5,201,164	04/13/1993	Kaufman		
	A77	5,243,841	09/14/1993	Fleissner		
	A78	5,271,575	12/21/1993	Weinert		
	A79	5,275,348	01/04/1994	Looser		
	A80	5,304,391	04/19/1994	Rantanen		
	A81	5,314,119	05/24/1994	Watt		
	A82	5,389,148	02/14/1995	Matsunaga		
	A83	5,401,315	03/28/1995	Salo et al.		
	A84	5,402,960	04/04/1995	Oliver et al.		
	A85	5,449,328	09/12/1995	Schmidt et al.		
	A86	5,478,027	12/26/1995	Alexander, III		
	A87	5,501,775	03/26/1996	Kotitschke et al.		
	A88	5,509,161	04/23/1996	Neveu et al.		
	A89	5,527,255	06/18/1996	Mansfield		
	A90	5,538,199	07/23/1996	Biagiotti		
	A91	5,540,332	07/30/1996	Kopacz et al.		
	A92	5,542,622	08/06/1996	Biagiotti		
	A93	5,545,295	08/13/1996	Fujita et al.		
	A94	5,578,124	11/26/1996	Cleveland et al.		
	A95	5,603,467	02/18/1997	Perini et al.		
	A96	5,639,046	06/17/1997	Biagiotti		
	A97	5,660,349	08/26/1997	Miller et al.		
	A98	5,648,083	07/15/1997	Blieszner et al.		
	A99	5,690,296	11/25/1997	Biagiotti		
	A100	5,759,339	06/02/1998	Hartman		
	A101	5,839,680	11/24/1998	Biagiotti		
	A102	5,848,756	12/15/1998	Sollinger et al.		
	A103	5,913,905	06/22/1999	Fleissner		

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

FORM PTO-1449	SERIAL NO. not yet assigned	CASE NO. 659/1770
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	FILING DATE September 17, 2003	GROUP ART UNIT --
(use several sheets if necessary)		APPLICANT(S): Daniel Hoo et al.

REFERENCE DESIGNATION U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS/ SUBCLASS	FILING DATE
	A104	5,958,187	09/28/1999	Bhat et al.		
	A105	6,056,229	05/02/2000	Blume et al.		
	A106	6,140,551	10/31/2000	Niemeyer et al.		
	A107	6,228,216 B1	05/08/2001	Lindsay et al.		
	A108	6,248,211 B1	06/19/2001	Jennings et al.		
	A109	6,444,214 B1	09/03/2002	Cole et al.		

FOREIGN PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	COUNTRY	CLASS/ SUBCLASS	TRANSLATION YES	NO
	A110	EP 0 014 520 A1	08/20/1980	EPO			
	A111	EP 0 014 520 B1	08/20/1980	EPO			
	A112	EP 0 026 091 A1	04/01/1981	EPO			
	A113	EP 0 026 091 B1	04/01/1981	EPO			
	A114	EP 0 256 950 A1	02/24/1988	EPO			
	A115	EP 0 641 885 A1	03/08/1995	EPO			
	A116	EP 0 895 956 A1	02/10/1999	EPO			
	A117	JP 2-91300	03/30/1990	Japan			X
	A118	JP 5-209395	08/20/1993	Japan			X
	A119	EP 0 580 561 A2	01/26/1994	EPO			
	A120	JP 6-306793	11/01/1994	Japan			X
	A121	WO 98/03713	01/29/1998	WIPO			
	A122	JP 10174670	06/30/1998	Japan		Abstract	
	A123	WO 99/29958	06/17/1999	WIPO			
	A124	WO 99/33623	07/08/1999	WIPO		Abstract	
	A125	WO 01/40090 A2	06/07/2001	WIPO			
	A126	WO 01/82986 A2	11/08/2001	WIPO			

EXAMINER INITIAL		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
	A127	SINCRO Brochure, FABIO PERINI, S.p.A., 9 pages
	A128	Copy of International Search Report from corresponding PCT application No. PCT/US01/20216, dated 10/07/02, 3 pages.

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

FORM PTO-1449	SERIAL NO. not yet assigned	CASE NO. 659/1770
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	FILING DATE September 17, 2003	GROUP ART UNIT --
(use several sheets if necessary)	APPLICANT(S): Daniel Hoo et al.	

	A129	Copy of Partial International Search Report from PCT application No. PCT/US01/21030, dated 10/28/02, 3 pages.
	A130	Search Report for Patent Cooperation Treaty application No. PCT/US02/21030, Date of Mailing 02/21/2003, 6 pages.

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

"Express Mail" mailing label number EL 835293200 US

Date of Deposit: September 17, 2003

Our Case No. 659/1770
K.C. No. 14,972B.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR:

Daniel Hoo
Brian James Gingras
Paul Kerner Pauling
Clayton Taylor Gann
Robert Eugene Krautkramer
James Monroe Perkins
Anthony Mark Gambaro
Robert Alvin Barkhau
Andrew Peter Doyle
James Leo Baggot
Joe Cwiakala
Valter Di Nardo
Massimiliano Adalberti
Stephano Petri
Guilio Betti

TITLE:

WET ROLL HAVING UNIFORM
COMPOSITION DISTRIBUTION

AGENT:

Jonathan P. Taylor, Ph.D.
Reg. No. 48,338

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200

WET ROLL HAVING UNIFORM COMPOSITION DISTRIBUTION BACKGROUND OF THE INVENTION

Wet products such as wet wipes have many applications. They may be used with small children and infants when changing diapers, they may be used for house hold cleaning tasks, they may be used for cleaning hands, they may be used as a bath tissue, they may be used as by a caregiver to clean a disabled or incontinent adult, or they may be used in and for a whole host of other applications, where it is advantageous to have a wipe or towel that has some moisture in it.

Wet wipes have been traditionally been made in processes in which larger webs of wipes are initially made and than these larger webs are converted into smaller rolls or sheets that can be placed in a dispenser. Embodiments of dispensers are described in application serial numbers 09/565,227 and 09/545,995; in application serial numbers 09/659,307; 09/659,295; 09/660,049; 09/659,311; 09/660,040; 09/659,283; 09/659,284; 09/659,306, filed September 12, 2000; in application serial number 09/748,618, filed December 22, 2000; in application serial number 09/841,323, filed April 24, 2001; in application serial number 09/844,731, filed April 27, 2001; and in application serial number 09/849,935, filed May 4, 2001; the disclosures of which are incorporated herein by reference.

Wet wipes can be any wipe, towel, tissue or sheet like product including natural fibers, synthetic fibers, synthetic material and combinations thereof, that is wet or moist. Examples of wet wipes are disclosed in application serial numbers 09/564,449; 09/564,213; 09/565,125; 09/564,837; 09/564,939; 09/564,531; 09/564,268; 09/564,424; 09/564,780; 09/564,212; 09/565,623 all filed May 4, 2000, and application serial no. 09/223,999 entitled Ion-Sensitive Hard Water Dispersible Polymers And Applications Therefor, filed December 31, 1998, the disclosures of which are incorporated herein by reference.

There is a need for improved methods for making wet wipes, particularly for making rolls of wet wipes. Typically, wet wipes are

manufactured as a roll of dry sheets and are then soaked in a wetting solution. Among other disadvantages, this method can lead to undesirable variations in the properties and performance of the wipes. It is desirable to manufacture wet wipes such that the wetting solution and its ingredients are uniformly distributed throughout the roll. It is also desirable to manufacture coreless rolls of wet wipes, which can be more conveniently packaged and sold.

BRIEF SUMMARY OF THE INVENTION

In an embodiment of the invention there is provided a method of making wet rolls, comprising providing a web of material; applying a wetting solution to the web to produce a wet web; and winding the wet web into a roll.

These embodiments may further comprise a method wherein the wetting solution is applied at an add-on greater than about 25%; the wetting solution is applied at an add-on between about 25% and about 700%; the wetting solution is applied at an add-on between about 50% and 400%; the wetting solution is applied at an add-on between about 100% and 350%; the wetting solution is applied at an add-on between about 150% and 300%; and the wetting solution is applied at an add-on between about 200% and 250%.

These embodiments may yet further comprise a method wherein the web travels at a speed of at least 60 meters per minute; the web travels at a speed of at least 80 meters per minute; the web travels at a speed of at least 150 meters per minute; and the web of material travels at a speed of at least 300 meters per minute. These embodiments may yet further comprise a method wherein the roll is coreless; the web comprises a wet-formed basesheet; the web comprises a non-woven basesheet; the web comprises a water-dispersible binder; the method is performed in an environment which is substantially free of contaminants; and the wetting solution is uniformly distributed in the wet web.

In an embodiment of the invention there is provided a method of making wet rolls, comprising providing a web of material from a source; controlling the draw of the web from the source; perforating the web;

positioning the perforated web adjacent a wetting apparatus; applying a wetting solution to at least one side of the web with an add-on of at least about 25% to yield a wet web; and winding the wet web into a roll.

5 These embodiments may further comprise a method wherein the providing comprises obtaining a roll of web material, and unwinding the roll; combining at least two web plies into a single web; and manufacturing a basesheet, and feeding the basesheet to an apparatus for wetting and winding the web. These embodiments may yet further comprise a method wherein the web travels at a speed of at least 60 meters per minute; wherein
10 the wetting solution comprises salt; wherein the positioning, applying, and winding are performed in an environment which is substantially free of contamination; and wherein the roll is coreless.

 These embodiments may yet further comprise a method wherein the wetting solution is applied at an add-on between about 25% and about 700%;
15 the wetting solution is applied at an add-on between about 50% and 400%; the wetting solution is applied at an add-on between about 100% and 350%; the wetting solution is applied at an add-on between about 150% and 300%; and the wetting solution is applied at an add-on between about 200% and 250%.

20 In an embodiment of the invention there is provided a method of making a wet coreless roll comprising: a) providing a wet web of material; b) breaking the wet web and forming a cigarette from the leading edge of the break; c) forming a roll of the wet web around the cigarette in a roll forming pocket; d) separating the wet web roll from the web while repeating step b);
25 and e) discharging the separated wet web roll from the roll forming pocket. These embodiments may further comprise perforating the web, and making the break of step b) along a line of perforation.

 These embodiments may yet further comprise a method wherein the roll forming pocket comprises a first roller, a second roller, and a third roller.

30 These embodiments may yet further comprise a method wherein the roll forming pocket comprises a first roller, a second roller, and a third roller; the wet web contacting the first roller, the second roller, and the third roller; the

first, second and third rollers rotating in the same circular direction; and the second roller rotating in a circular direction opposite from the direction of movement of the wet web. These embodiments may further comprise a method wherein the method is performed in an environment which is substantially free of contaminants; wherein the web travels at a speed of at least 60 meters per minute; and wherein the wet web comprises an add-on of a wetting solution of at least about 25%.

In an embodiment of the invention there is provided a method of making wet coreless rolls comprising providing a wet web; winding the wet web into a roll using a roll forming pocket; the roll forming pocket comprising a first roller, a second roller and a third roller; the wet web contacting the first roller, the second roller, and the third roller; the first, second and third rollers rotating in the same direction; and the second roller rotating in a direction opposite from the direction of movement of the wet web; and discharging the wet web roll from the roll forming pocket.

These embodiments may further comprise a method wherein the wet web is made by applying a wetting solution to a basesheet; wherein the wetting solution comprises salt; and wherein the method is performed in an environment which is substantially free of contaminants.

These embodiments may yet further comprise a method wherein the wetting solution is applied at an add-on greater than about 25%; wherein the wetting solution is applied at an add-on between about 25% and about 700%; the wetting solution is applied at an add-on between about 50% and 400%; the wetting solution is applied at an add-on between about 100% and 350%; the wetting solution is applied at an add-on between about 150% and 300%; and the wetting solution is applied at an add-on between about 200% and 250%.

In an embodiment of the invention, there is provided an apparatus for wetting and winding a substrate, comprising means for applying a wetting solution to the substrate to form a wet substrate; and means for winding coreless rolls of the wet substrate.

These embodiments may further comprise a means for perforating the substrate. These embodiments may yet further comprise an apparatus wherein the means for applying a wetting solution distributes the wetting solution evenly along the substrate; wherein the means for applying a wetting solution comprises a means for increasing the absorption rate of the solution in the substrate; wherein the wetting solution is present in the wet substrate in an add-on of at least about 25%; and wherein the apparatus is in an environment which is substantially free of contaminants.

In an embodiment of the invention there is provided an apparatus for wetting and winding a substrate, comprising a wetting apparatus; and a winding apparatus; wherein the winding apparatus can form wet coreless rolls with an add-on of at least about 25%. These embodiments may further comprise a perforating apparatus and a detour roller.

These embodiments may yet further comprise an apparatus wherein the wetting apparatus is a fluid distribution header; wherein the wetting apparatus is a spray boom; wherein the wetting apparatus comprises a drool bar; wherein the wetting apparatus comprises press rolls; and wherein the winding apparatus comprises an upper winding roller, a lower winding roller, a rider roller and a transfer shoe.

In an embodiment of the invention there is provided a method of winding a wet web, comprising providing a wet web of material; applying a wetting solution to the web to produce a wet web, the wetting solution comprising a salt, preferably an inorganic salt; and winding the wet web into a wet roll; wherein the variability of the salt throughout the wet roll is less than about 20%.

These embodiments may further comprise a method, wherein the variability of the salt is less than about 10%, less than about 5%, and less than about 3%; wherein the wetting solution further comprises at least one preservative, the variability of each preservative throughout the wet roll being less than about 60%.

In an embodiment of the invention there is provided a method of making wet rolls, comprising providing a web of material; applying a wetting

solution to the web to produce a wet web, the wetting solution comprising at least one preservative; and winding the wet web into a wet roll; wherein the variability of each preservative throughout the wet roll is less than about 60%.

5 These embodiments may further comprise a method, wherein the variability of the salt is less than about 50%, less than about 40%, and less than about 35%.

10 In an embodiment of the invention there is provided a method of making wet rolls, comprising providing a web of material; applying a wetting solution to the web to produce a wet web, the wetting solution comprising an salt, preferably an inorganic salt; at least one preservative; and winding the wet web into a wet roll; wherein the variability of the salt throughout the wet roll is less than about 10%, and the variability of each preservative throughout the wet roll is less than about 50%.

15 These embodiments may further comprise a method, wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%; wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%; wherein the variability of the salt throughout the wet roll is at most about 2.5%, and the variability of each preservative throughout the wet roll is at most about 32.5%; wherein the salt is sodium chloride; wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid; wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid; wherein the web comprises a water-dispersible binder; and wherein the wet roll is coreless.

25 In an embodiment of the invention there is provided a wet coreless roll, comprising a basesheet; a salt, preferably an inorganic salt; and at least one preservative; wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each preservative throughout the wet roll is less than about 60%.

30 These embodiments may further comprise a wet coreless roll, wherein the variability of the salt throughout the wet roll is less than about 10%, and

the variability of each preservative throughout the wet roll is less than about 50%; wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%; wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%; wherein the salt is sodium chloride; wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid; wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid; and wherein the basesheet comprises a water-dispersible binder.

In an embodiment of the invention there is provided a wet coreless roll prepared by a process comprising: providing a web of material; applying a wetting solution to the web to produce a wet web, the wetting solution comprising a salt, preferably an inorganic salt; at least one preservative; and winding the wet web into a wet roll.

These embodiments may further comprise a wet coreless roll, wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each preservative throughout the wet roll is less than about 60%; wherein the variability of the salt throughout the wet roll is less than about 10%, and the variability of each preservative throughout the wet roll is less than about 50%; wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%; wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%; wherein the salt is sodium chloride; wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid; wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid; and wherein the web of material comprises a water-dispersible binder.

In an embodiment of the invention there is provided a wet coreless roll, comprising a basesheet comprising a water-dispersible binder; sodium chloride; and at least one preservative selected from the group consisting of

IPBC, DMDM Hydantoin, and malic acid; wherein the variability of the salt throughout the wet coreless roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%.

5 In an embodiment of the invention there is provided a method of winding a wet web, comprising providing a wet web of material; pinning said wet web against a low friction surface; sliding said wet web across said low friction surface toward a high friction surface; contacting said wet web against said high friction surface; moving said wet web across said high friction surface to form a bunched portion of the web; and winding the wet web
10 around the bunched portion.

In another embodiment, the present invention provides a method of winding a wet web, comprising providing a wet web of material; applying a wetting solution to the web to produce a wet web, the wetting solution comprising at least about 0.5% of a salt; and winding the wet web into a wet
15 roll; wherein the variability of the salt throughout the wet roll is less than about 20%.

In another embodiment, the invention provides a wet roll, comprising a basesheet; a salt; and at least one preservative; wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each
20 preservative throughout the wet roll is less than about 60%.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagrammatic view of an apparatus connected to a parent roll.

25 Figure 2 is a diagrammatic view of the wetting and winding apparatus of Figure 1.

Figure 3 is a diagrammatic view of housings for the wetting and winding apparatus of Figure 2.

Figure 4 is a diagrammatic view of a fluid distribution header.

30 Figure 5 is a diagrammatic view of a spray boom.

Figure 6 is a diagrammatic view of a wetting and winding apparatus with press rolls.

Figures 7-9 are diagrammatic views of nips for a wetting apparatus.

Figures 10-11 are diagrammatic views of a wet winding apparatus.

5 Figure 12 is a diagrammatic view of the winding rollers and transfer shoe.

Figure 13 is a diagrammatic view of the winding rollers and transfer shoe, illustrating the breaking of the web.

Figure 14 is a plan view of the surface of a transfer shoe.

10 Figure 15 is a diagrammatic view of a spray boom.

DETAILED DESCRIPTION

A method for making wet rolls is provided which in general includes winding a wet substrate into a wet roll. The method may provide for even distribution and absorption of a fluid throughout a substrate to provide the wet
15 substrate. The method may include winding a substrate that has a fluid add-on of at least about 25%. An apparatus for performing the method is also provided.

Referring to Figure 1, there is in general provided a web of material 2. This source web may be any type of basesheet known to those skilled in the art. For example, the web may be a wet-formed basesheet such as a tissue
20 or towel basesheet. The web may be a non-woven basesheet, such as an airlaid, spun-laid, hydroentangled, spun-bond, or melt-blown basesheet. The web may be a multi-layer basesheet, such as a laminate of any combination of these basesheets. The basesheet may contain a binder, for example a
25 non-dispersible binder, such as a latex binder or a cross-linkable binder; or a water-dispersible binder, such as a temperature-sensitive water dispersible binder or an ion-sensitive water dispersible binder. Ion-sensitive water-dispersible binders, such as those disclosed in the above-referenced co-
pending patent applications, provide for water dispersibility of 80% or greater.
30 Water dispersibility is defined as: 1 minus (the cross-direction wet tensile strength in water, divided by the original cross-direction wet tensile strength of

the wet wipe), multiplied by 100%. Examples of individual webs include a melt-blown basesheet with a latex binder; a spun-bond basesheet with a temperature-sensitive water dispersible binder; and an airlaid basesheet with an ion-sensitive water dispersible binder.

5 The web is delivered to the wetting and winding apparatus 1 as a sheet of material. The web may be unwound from a roll, or it may be fed to the apparatus directly from a web making apparatus. The web may be a single sheet, or the web may have multiple sheets which are combined to form a multi-ply sheet. Multi-ply sheets may be bonded together, for example with
10 adhesives, thermal bonding, sonic bonding, or hydroentanglement. Referring to Figure 1, the web may be dispensed from a parent roll 4 which can be mounted on a rotating shaft 6. The spiral wind 16 of the parent roll allows the roll to be unwound in the direction of arrow 18. The unwinding of the roll can be controlled such that the web is dispensed at a consistent speed and
15 tension even though the size of the roll is decreasing. The web is delivered in the form of a sheet to the wetting apparatus 35 in the direction of arrow 20. The delivery may be controlled by a series of rollers (8, 10, 12, 14, 22, 24) to adjust the speed of the delivery and/or the tension applied to the web. These rollers may independently be, for example, dancer rollers, idler rollers, draw
20 rollers, or bowed rollers. The speed of the web may be at least 60 meters per minute (m/min). Preferably, the speed of the web is at least 80 m/min; more preferably at least 150 m/min; more preferably still at least 300 m/min.

 There may optionally be a device for perforating the web. Referring to Figure 2, the perforation may be accomplished by a pair of rollers 30 and 32,
25 wherein at least one of the rollers 30 comprises a series of teeth or blades 31 such that the impact of the rollers on the web results in incisions in a line forming a perforation line. The incisions within the perforation line may be spaced regularly, they may be spaced randomly, or they may be spaced in a controlled arrangement. The perforations are preferably in the cross direction
30 (CD) of the web; that is in the plane of the web perpendicular to the direction of movement, or the machine direction (MD). The perforating rollers optionally may be contained in a housing 26, as illustrated in Figures 1-3.

The perforation may be accomplished by methods known to those skilled in the art. For example, a perforating apparatus as described in U.S. Pat. No. 5,125,302, incorporated herein by reference, may be used to perforate the web. The perforating apparatus may contain a rotating
5 perforation roll and a stationary anvil bar. The perforation roll in this case has multiple rows of blades along the CD of the roll, and these blades protrude slightly from the face of the roll. The space between these rows and the length of the blades dictates the perforation length and spacing. The anvil bar is typically configured as a helix, for example a double helix or single helix,
10 such that it contacts the perforation blades only at one or two positions at a time. Thus, as the perforation roll rotates, the web becomes perforated across the entire web. The web typically wraps the rotating perforation roll. The perforating apparatus may contain a rotating anvil roll with a stationary perforation blade. Typically, multiple anvil bars are configured in a helix
15 around the anvil roll and engage the perforation blade. The web is perforated in one location at any one time. The web does not typically wrap either the anvil roll or the perforation blade. Also, the anvil roll may be kept stationary and the perforation blade may be rotated on a roll.

Referring to Figure 2, a wetting solution may be applied to the web by
20 wetting apparatus 35, and the wet web 42 is then delivered in the direction of arrow 20 to the wet winding apparatus 41. This delivery may be accomplished by the use of rollers or belts such as roller 40. Care must be taken in handling the wet web since the presence of moisture in the web can alter the physical properties of the material. For example, incorporation of
25 225% by weight of a wetting solution can increase the percent elongation at failure (i.e. "stretch") of a web from 5-10% to 25-40%. In general, the strength of the web is also decreased upon application of a given wetting solution. Typically, perforations also will diminish the strength of the wet web.

The wet winding apparatus may be any winding apparatus known to
30 those skilled in the art. The wet winding apparatus may, for example, wind a web around a removable mandrel to produce a coreless material (U.S. Pat. Nos. 5,387,284; 5,271,515; 5,271,137; 3,856,226). The winding apparatus

may, for example, wind a web around a tubular or cylindrical core (U.S. Pat. Nos. 6,129,304; 5,979,818; 5,368, 252; 5,248,106; 5,137,225; 4,487,377). The winding apparatus may, for example, be a coreless surface winder which can produce coreless rolls without the use of a mandrel. (U.S. Pat. Nos. 5,839,680; 5,690,296; 5,603,467; 5,542,622; 5,538,199; 5,402,960; 4,856,725). The above applications are incorporated herein by reference.

Referring to Figure 2, a coreless surface winder for the wet web in general can provide for continuous winding of wet coreless rolls 66. The wound roll 66 is separated from the wet web when the web is broken by the winder. It is desirable, although not required, that each roll produced by this apparatus under a given set of conditions has substantially the same number of sheets (as defined by lines of perforations) and substantially the same dimensions. The wound wet rolls are then collected or delivered for storage or further processing. The collection or delivery may be accomplished by the use of a conveyor, a collection bin, or a metering device 78 for dispensing the rolls to another apparatus.

The wetting and winding apparatus 35 and 41 may be enclosed in a containment box 28 to which the web 34 is delivered. Such a box serves to contain the wetting solution and to maintain a sanitary environment around the wet web. The area outside the box, including the dry components of the apparatus 1 and other equipment, is shielded from contact with the wetting solution. Thus, the workspace outside the box remains safe and easy to service. Containment of the wetting solution also provides for recovery of any excess solution that is not absorbed by the web. Recovered wetting solution may or may not be recycled depending on sanitary considerations. Excess wetting solution can be removed from the box by way of a drain. The drain can also provide for removal of any liquids used for cleaning the apparatus.

The setup of the wetting and winding apparatus and the containment box may be performed in an environment that is controlled to minimize airborne contaminants. The box can thus maintain the wetting and winding apparatus, the wet web, and the resultant wet rolls, in an environment which is substantially free of contaminants. Environmental parameters which may

be controlled include air circulation and filtration, temperature, and humidity. The apparatus and the box may be sanitized on a periodic basis. The wetted areas inside the box may be treated with cleaning agents to eliminate any contamination, such as mold, fungus, or bacterial growth. The wetted areas
5 may further be rinsed with clean, preferably ozonated, water, and then dried and/or treated with alcohol, such as isopropanol. Any components outside the box that come into contact with the basesheet are also preferably sprayed or wiped with alcohol. The size of the box may be large enough to allow access to the components inside the box, yet not so large that liquid could
10 collect and contribute to contamination. In the embodiment illustrated in Figure 3, physical access can be obtained by way of doors 72 and 74 on the sides of the box. The apparatus and the quality of the environment within the box may be monitored by way of corrosion-resistant windows 76, such as polycarbonate. The containment box may be constructed of any material
15 which is not susceptible to corrosion, such as stainless steel. The box may be ventilated, depending on the characteristics of the wetting solution.

The wetting apparatus 35 includes a device for solution application and, optionally, a support for the web. The support may be an air plate, a set of belts or a backing roller 38. The support may be stationary, as in the case
20 of an air plate; or it may be movable, as in the case of a roller. The support should be constructed of corrosion resistant material such as stainless steel or chrome. In the embodiment shown in Figure 2, a backing roller 38 is adjustably mounted near the solution applicator. The roller may rotate idly or may rotate at a given speed, such as the speed of the web.

It is desirable to have even distribution of the wetting solution
25 throughout the web in all directions. This homogenous wetting has many advantages. It can help to minimize or eliminate differences in physical properties within the web, such as strain and strength characteristics, allowing for reproducible processing of the wet product. It can help to minimize
30 colonization and growth of contaminants. It can help to ensure consistent product quality; that is, a given roll of wet wipes will have substantially the

same characteristics as another roll of wet wipes produced under specific operating conditions.

Even application of the wetting solution can help to provide uniform distribution of the ingredients initially present in the solution, such as dispersibility agents, preservatives, fragrances, or other additives. The distribution of ingredients may be uniform within the web of material in both the cross-direction and the machine-direction. Wet rolls made from such a web then may also have a uniform distribution of ingredients, and this uniformity may be consistent within a roll (i.e. from the outside to the center, and from one end of the roll to the other) or from one roll to another. A uniform distribution of ingredients provides for consistent storage and dispensing characteristics of a roll of wet wipes. For example, the entire roll can be equally protected from contamination if there is uniform distribution of a preservative. In another example, the roll can be dispensed acceptably regardless of the number of sheets which remain in the roll. Dispensing characteristics include, for example, peel strength, tensile strength, and perf strength, as defined in the above mentioned US application serial number 09/659,307. These may be independently affected by the distribution of the wetting solution.

Examples of wetting solutions are given in the above mentioned U.S. applications serial numbers 09/564,449; 09/564,213; 09/565,125; 09/564,837; 09/564,939; 09/564,531; 09/564,268; 09/564,424; 09/564,780; 09/564,212; 09/565,623; and 09/223,999. Preferably, the wetting solution is added to the web with an add-on greater than about 25%. The amount of liquid or wetting solution contained within a given wet web can vary depending on factors including the type of basesheet, the type of liquid or solution being used, the wetting conditions employed, the type of container used to store the wet wipes, and the intended end use of the wet web. Typically, each wet web can contain from about 25 to about 600 weight percent and desirably from about 200 to about 400 weight percent liquid based on the dry weight of the web. To determine the liquid add-on, first the weight of a portion of dry web having specific dimensions is determined. The dry web corresponds to the

basesheet which can be fed to the wetting and winding apparatus. Then, the amount of liquid by weight equal to a multiple (e.g. 1, 1.5, 2.5, 3.3, etc., times) where 1 = 100%, 2.5 = 250%, etc., of the portion of the dry web, or an increased amount of liquid measured as a percent add-on based on the weight of the dry web portion, is added to the web to make it moistened, and then referred to as a "wet" web. A wet web is defined as a web which contains a solution add-on between 25% and the maximum add-on which can be accepted by the web (i.e. saturation). Preferably, the wetting solution add-on is between about 25% and 700%; more preferably between 50% and 400%; more preferably still between 100% and 350%; more preferably still between 150% and 300%; more preferably still between 200% and 250%.

Complete absorption of the wetting solution helps to minimize the amount of excess liquid on the web and thus on the components of the apparatus. The term "complete absorption" refers to the absorption of liquid by a material such that no liquid will freely drop from the material when the material is held vertically for 30 seconds. The wetting and winding apparatus may be separated by a distance such that the wetting solution can be completely absorbed by the web as it travels between the wetting apparatus and the winding apparatus. This travel time may range from less than one second to about one minute. The rate of absorption can depend on many factors, including the type of basesheet, the characteristics of the binder, and the composition used as the wetting solution.

The configuration of the wetting and winding apparatus may, however, be limited, for example by space constraints or other manufacturing considerations. If there is not a sufficient distance between the apparatus, it may be desirable that the wetting solution is absorbed in a shorter time than is necessary for absorption due to simple contact between the web and the wetting solution. Higher rates of absorption can allow for higher machine speeds and increased product throughput.

Numerous parameters may be controlled in order to influence the degree and/or rate of absorption of the wetting solution, as well as the amount of solution that is wasted and/or recycled. These parameters include, for

example the solution add-on level, the temperature of the wetting solution, the geometry of impingement of the solution, and the pressure applied to the web during and/or after the solution application. Ideally, the wetting solution impinges evenly along the entire cross-direction of the web.

5 The wetting solution can be applied by methods known to those skilled in the art. The wetting apparatus may contain, for example, a fluid distribution header, such as a die with a single orifice; a drool bar; a spray boom, such as a boom with multiple nozzles; or press rolls. The apparatus may contain, for example, a fluid distribution header 100 with an adjustable die 102 (Figure 4).
10 The size of the orifice in the die, the temperature of the die, and the volume of solution applied may be controlled such that the liquid exits the die with a uniform pressure, temperature, and geometry.

 The apparatus may contain a spray boom 110 with multiple nozzles 112 (Figure 5). The distribution of the nozzles along the boom, as well as
15 their orientation with respect to the web, may be adjusted to provide for substantially uniform application of liquid. For example, the spray boom may include a pipe which extends across the cross-direction of the web. This pipe may have nozzles across its length which spray the wetting solution onto the web. The distance between the individual nozzles and the distance between
20 the nozzles and the web can affect the uniformity of application of the solution. It is desirable that the sprays from the nozzles do not interfere with each other when impinging the web. To help prevent this interference, it may be beneficial for the nozzles to be "shingled." That is, the orientation of the nozzles may be rotated from being in line with each other in the cross-
25 direction. Referring to Figure 15, the nozzles 112 may be arranged in a single line and may be rotated 5-10 degrees from the cross-direction line so that the sprays 113 do not physically interfere with each other. The amount of solution delivered to the boom and its nozzles may be adjusted according to the speed of the web. Thus, a uniform amount of solution may be applied, not only in
30 the cross-direction, but also in the machine-direction regardless of the speed of the web. For high machine speeds, it may be desirable to use nozzles having larger orifices and/or to utilize more than one spray boom. Multiple

spray booms may be employed to deliver amounts of solution which are different or which are the same.

Referring to Figure 6, the wetting apparatus may optionally include a set of press rolls. For example, the press rolls 130 and 132 may be rubber-covered rolls positioned to contact the web. The wetting solution 134 may be applied to the web, for example by a fluid distribution header or a spray boom. The wetting solution may also be applied to the press rolls, for example by a set of drool bars. The press rolls may be configured to apply force to the web, such that the solution is forced into the basesheet. This can help prevent a film of excess solution from forming on the surface of the sheet. The interaction of the press rolls with the web may be modified as needed to provide for complete solution absorption. For example, the press rolls may be removed from contact with the web if the absorption is sufficiently complete without added pressure. The press rolls may, for example, contact the web with a pressure that is controllable and which can be adjusted to modify the rate of absorption.

The wetting apparatus may include the use of a nip to improve distribution and absorption. A nip may be formed by the convergence of a web 123 and a header 124 (Figure 7), a web 123 and a roller 126 (Figure 8), or two rollers 127 and 128 (Figure 9). In these embodiments, the application of fluid 130 is controlled by parameters including the distance between the elements forming the nip. Solution application may be accomplished by the use of other apparatus known to those skilled in the art. For example, the web may be passed through a bath or trough containing the wetting solution. The web may be wetted by contact with a material that is wet, such as a wetted belt or roller or a wet sponge. The application of solution may be accomplished in more than one step; that is by two or more wetting steps, which may be the same or different.

The application of a uniform amount of wetting solution to the web before winding the web into a roll can provide for a uniform distribution of ingredients throughout the roll. This, in turn, can provide for consistent product quality (i.e. from roll to roll) as well as for consistent properties of an

individual roll which may be used by a consumer. For example, in wet rolls made from a basesheet with an ion-sensitive water-dispersible binder, an even distribution of an inorganic salt, such as sodium chloride (NaCl), potassium chloride (KCl) or potassium bromide (KBr), can ensure that any given portion of a wet roll will disperse in water at an acceptable rate. Also, the presence of a uniform distribution of inorganic salt can ensure that none of the roll will experience a decrease in wet strength, for example, during production, storage, or use. In another example, a set of preservatives may be used in the wetting solution to guard against contamination of the wet roll. Insufficient preservative levels in a portion of a roll can allow the presence and/or growth of contaminants, even if the remainder of the roll is adequately protected. Accumulation of preservative in a portion of a roll can cause the wet sheet to have an undesirable feel and/or wiping properties. An excess of preservative, in some areas of the sheet, could contribute to allergic or irritant contact dermatitis if that area was wiped on the skin. A uniform distribution of ingredients can prevent the occurrence of either of these extremes.

Uniformity of ingredients within a wet roll is determined by analyzing samples of the roll according to the following representative method. The method of analysis of ingredients may be chosen depending on the product to be analyzed, as well as the surrounding environment. The roll is unwound, and the first five sheets, the middle five sheets, and the last five sheets are removed. These sets of sheets correspond the outside portion of the roll, the portion of the roll midway between the outside and the center, and the center of the roll, respectively. Each set of sheets is then folded and cut into three equal sections corresponding to the left, middle, and right of the roll when the roll is viewed perpendicular to its axis. The sections are individually stored in airtight, moisture loss resistant containers. An individual section is placed in a syringe and compressed to express the solution. This solution is then diluted and tested for chloride using ion chromatography and tested for acid using ion-exclusion liquid chromatography. The chloride data can be converted into data for the inorganic salt level. For wipes which do not express sufficient liquid, the section is extracted with 1:1 methanol and water for 12 hours in an

orbital shaker. The section from which liquid has been expressed or extracted is dried in an oven at 60°C for 36 hours to a constant weight. The dried section is extracted with methanol in an orbital shaker for 12 hours. An aliquot of the extract is dried, and the solids are extracted with the mobile phase to be used for liquid chromatography. Liquid chromatography is used to determine the amount of non-acid preservative. For the measurement of IPBC, a section taken directly from the wet roll is dried in an oven at 60°C for 36 hours to a constant weight and extracted for 4 hours with methanol. An aliquot of the extract is dried, the solids are extracted with the mobile phase, and the amount of IPBC is determined by liquid chromatography.

For a wet roll which was formed by the wetting and winding process and apparatus described herein and using a wetting solution containing sodium chloride as the inorganic salt and containing iodopropynyl butylcarbamate (IPBC), DMDM Hydantoin, and malic acid as the preservatives, the data for the distribution of the inorganic salt and for the distribution of the preservatives are given in Table 1.

Table 1

Sheets/Section	Sodium Chloride (%)		
	Left	Middle	Right
Outer 5	4.40	4.37	4.37
Middle 5	4.35	4.30	4.41
Inner 5	4.35	4.68	4.35
	IPBC (µg/g)		
	Left	Middle	Right
Outer 5	65	35	39
Middle 5	52	33	26
Inner 5	30	30	35
DMDM Hydantoin (ppm)			

	Left	Middle	Right
Outer 5	2460	2410	2390
Middle 5	2310	2270	2300
Inner 5	2210	2320	2220
	Malic acid (ppm)		
	Left	Middle	Right
Outer 5	439	495	432
Middle 5	424	428	421
Inner 5	423	433	454

The variability of the distribution of an ingredient is defined as the standard deviation as a percentage of the average mean value for all the data points obtained. For example, for the sodium chloride data above, the mean value is 4.40 with a standard deviation of 0.11, which is 2.5% of the mean value. Thus, the sodium chloride values have a variability of 2.5%. The variabilities for IPBC, DMDM Hydantoin, and malic acid are 32.5%, 3.7%, and 5.3%, respectively. It is preferred that the inorganic salt has a variability of less than about 20%, more preferably less than about 10%, more preferably still less than about 5%, more preferably still less than about 3%. It is noted that the inorganic salt is considered an additive only when present at a level of at least about 0.5%, more preferably at least about 1.0%. Some inorganic salt may be present in any wetting solution at levels below these loadings, for example due to water impurities or residual cleaning solutions. For the preservatives in the wet roll, it is preferred that all preservatives individually have a variability of less than about 60%, more preferably less than about 50%, more preferably still less than about 40%, more preferably still less than about 35%. The above are examples of the uniformity of addition of ingredients that may be obtained with the present invention. Such uniformity may also be obtained for other additives and types of additives, and this invention is not limited to those additives exemplified above.

Referring to Figures 2 and 6, the wetting apparatus may optionally include a detour roller 40 positioned to contact the web after the solution application and before the wet winding. This roller assists in transferring the wet web from the wetting apparatus to the winding apparatus. The detour roller can provide a frictional surface to ensure adequate tension in the web. This can be especially advantageous during the separation of a completely wound wet log from the rest of the web. Also, the detour roller can provide a preferred geometry between the web and the winding apparatus to ensure adequate contact between the wet web and the upper winding roller of the winding apparatus.

Referring to Figures 10-13, the wet winding apparatus 41 includes an upper winding roller 44, a lower winding roller 46, and a rider roller 50. The upper winding roller rotates in the direction of arrow 52, so that, when in contact with the wet web, it is moving in the same direction as the web. At a point downstream from the point where the web 42 and the upper winding roller meet, the lower winding roller 46 contacts the exposed side of the web. The lower winding roller rotates in the direction of arrow 56, which is opposite that of the motion of the wet web when the roller and web are in contact. It follows that the upper and lower winding rollers rotate in the same circular direction (i.e. clockwise or counter-clockwise). The contact of both the upper winding roller and the transfer shoe 48 on the web breaks the web into a downstream portion 106 and an upstream portion 105 (Figure 13). This contact also causes the leading edge of the upstream portion of the web to fold or bunch together into an embryonic roll, called a cigarette 86. The cigarette 86 is caused to rotate in the circular direction 84, which is opposite that of the winding rollers, to form a roll 62. The rider roller 50 is positioned to contact the rotating roll 62 after the point of contact between the winding rollers. The convergence of the rider roller with the winding rollers forms a roll winding pocket 60. The rider roller rotates in the same circular direction 58 as the winding rollers, thus coordinating with the winding rollers to promote rotation of the wet web, in the direction of arrow 84, into a wet roll 62. The

rider roller also helps prevent the wet roll from leaving the pocket before a roll of the desired dimensions and/or sheet content is formed.

The upper winding roller preferably has a high friction surface 45 to stabilize the wet web on the roller. A high friction surface is defined as having a surface roughness greater than 250 roughness average (Ra). The friction of a surface can also be quantified in terms of coefficient of friction, in which a higher coefficient of friction corresponds to a higher friction surface.

Roughness average is measured by a profilometer, and is based on a graphical centerline, which is the line through the profile of the surface where the sums of the area on either side of the line (peaks and valleys) are equal. Roughness average is defined as the arithmetic average of the height of the peaks above the graphical centerline over a given area, and is expressed in units of microinches (0.000001 inch). The graphical centerline is the least-squares best fit line through the profile data. An example of a profilometer is the Model S5 TALYSURF Surface Profilometer (RANK TAYLOR HOBSON, LTD., Leicester, England). The Ra of a surface can be measured following the procedures described in U.S. Pat. No. 6,140,551, which is incorporated herein by reference, using a single line trace of the surface and a "cut-off" length of 0.8 mm. For example, an 8 mm sampling length would consist of 10 cut-offs of 0.8 mm each.

A presently preferred material for the surface 45 of the upper winding roller is tungsten carbide. Preferably, the surface of the upper winding roller has a roughness of at least about 300 Ra, more preferably at least about 500 Ra, more preferably still at least about 600 Ra, and more preferably still at least about 700 Ra. It is desirable to wind the wet web without the use of vacuum rollers, which contain vacuum ports on their surface to ensure stability of the web. The wetting solution, especially if present in excess (i.e. not fully absorbed by the web), can accumulate on the surface of the web and can also be transferred to the rollers and/or other components of the wet winding apparatus. A high friction surface on the upper winding roll can help to compensate for the decrease in the coefficient of friction of the web due to the presence of the wetting solution. The position of the upper winding roller

relative to the detour roller may provide for the web to wrap around a portion of the upper winding roller. Typically, at least 10% of the surface area of the upper winding roller contacts the web. The detour roller preferably has a high friction surface, which may be made of tungsten carbide. More preferably, the surface roughness of the detour roller is at least about 300 Ra, more preferably still at least about 500 Ra.

Referring to Figure 12, the upper winding roller may also contain two regions which extend across the roller in the cross direction. The downstream region 140 has a smooth surface of stainless steel and has a slightly raised area 142 approximately halfway across the face of the insert. The upstream region 144 is approximately 0.5 mm taller than the raised smooth region. The upstream region also has a plurality of grooves in the cross direction which provide a higher surface roughness than the remainder of the tungsten carbide surface 146. The upstream region may have channels cut into the insert, and these channels may be in the cross-direction and/or the machine direction. Channels in both the cross-direction and the machine-direction may provide an array of flat-top pyramids. For example, the channels may be cut at angles of 60 degrees with a pitch of 1.12 mm, and each flat-top pyramid may have a height of 0.7 mm. The flat surface of the pyramids may further have a tungsten carbide coating to provide a high friction surface.

The coordinated action of the upper winding roller and the transfer shoe 48 on the web results in the beginning of the formation of a log. The transfer shoe is preferably a rigid material with a high friction surface. The transfer shoe also has a concave surface 49 with a radius of curvature that is substantially the same as that of the upper winding roller. The curvature may be interrupted by a ridge 150. The transfer shoe may be mounted so that it can move along the directions of arrow 54 in an indexing motion. To start the winding of a new log, the transfer shoe is indexed towards the upper winding roller. The shoe is illustrated in the raised position 80 in Figure 10 and in the lowered position 82 in Figure 11. The rate and/or frequency of movement of the transfer shoe may be adjustable so as to provide for rolls of different dimensions or to accommodate other substrates or machine speeds.

Referring to Figure 14, the curved surface 49 of the transfer shoe may further have a plurality of dimples 158. These dimples may help to channel any excess moisture from the surface of the wet web, or they may help to provide sufficient friction to assist in the formation of the cigarette. The dimples may be cylindrical elements having a diameter of about 1.5 mm and a height of about 1 mm. The tops of the dimples may be rounded, they may be flat, or they may have ridges which can have a height of about 0.05 mm. These dimples may be arrayed as shown in Figure 14, with rows along the cross direction which have a spacing 154 of 2.5 mm, and a spacing 156 of the dimples within the row of 3.00 mm. Alternate rows may be offset by 1.50 mm. Such a configuration provides for about 85 dimples per square inch. The dimpled surface of the transfer shoe may also be covered with a belt.

The web 42, upper winding roller, and transfer shoe converge to trap a portion of the web between the smooth region of the upper winding roller and the ridge on the transfer shoe. A perforated web will have a line of perforation downstream from this line of convergence, and the distance between the line of perforation and the line of convergence may be from 0 mm to the distance between two adjacent lines of perforation. For a web having 5 inches (127 mm) between lines of perforation, the distance between the line of perforation and the line of convergence may be between 0 mm and 127 mm. The distance between the line of perforation and the line of convergence may be from about 1 mm to about 50 mm, from about 5 mm to about 30 mm, and from about 6 mm to about 13 mm.

Referring to Figure 13, the convergence of the web, upper winding roller, and transfer shoe serves to reduce the speed of the web at that point, relative to the speed of the web at the perforation. The trapped portion of the web is pinched between the upper winding roller and the transfer shoe ridge, and the web is pulled across the smooth insert. The downstream portion of the web 106 remains anchored to the tungsten carbide surface of the upper winding roller just in front of the smooth insert. The action of pulling the web back or stalling the web on the smooth insert breaks the perforation, forming a leading edge 92 connected to the trapped portion of the web. The ridge on

the transfer shoe stays engaged to the upper winding roller, pinning the leading edge until the web contacts the edge of the high surface roughness region. The web is then bunched up between the ridge and the high surface roughness region. This bunched portion then doubles back against the upstream portion of the web 105 and begins to roll into a cigarette 86 due to the differential friction between the rough region and the smooth region. The difference between the surface roughness of the rough region and the surface of the transfer shoe is preferably between 700 Ra and 50 Ra.

The cigarette 86 stays in contact with the upper winding roller, and the rotational movement of the upper winding roller continues to roll the cigarette across the surface of the transfer shoe. The upper winding roller may also move slightly upward (vertically) to allow the cigarette to increase in diameter. The cigarette then moves off the transfer shoe surface and into the gap 152 between the upper winding roller and lower winding roller. Simultaneously, the speed of the lower winding roller is increased from a speed less than the speed of the web to substantially the same speed as the web. The transfer shoe may have fingers that mesh with grooves in the lower winding roller to provide a smooth surface for the cigarette to transition from the shoe to the roller. The growing roll continues to move into the winding pocket 60 until contacted by the rider roller. During the winding of the roll, the lower winding roller and the rider roller rotate at speeds substantially the same as the upper winding roller. The log continues to wind, increasing in size until the proper sheet count and/or diameter is obtained. The rotational speeds of the upper winding roller, the lower winding roller, and the rider roller may be independently varied to control the winding firmness.

It is preferred that the lower winding roller has a tungsten carbide surface. Preferably, the surface of the upper winding roller has a roughness of at least about 300 Ra, more preferably at least about 500 Ra, more preferably still at least about 600 Ra, and more preferably still at least about 700 Ra.

The rider roller is preferably mounted on a movable rider roller arm 94 (Figure 2). The rider roller arm allows for release of a wound roll 66 from the

roll pocket 60 when the rider roller is moved away from the winding rollers. Convergence of the rider roller with the winding rollers forms the roll winding pocket. As a roll nears completion, the rotational motion of the lower winding roller may decrease, and the rotational motion of the rider roller may increase.

5 This speed differential helps to remove the full size roll from the winding pocket. The motion of the rider roller arm may be coordinated with the movement of the transfer shoe such that the release of a wound roll 66 coincides with the separation of the roll 66 from the web 42 and the start of a cigarette 86. Thus, as the full size roll exits the pocket, the web is
10 sandwiched between the transfer shoe ridge and the smooth region of the upper winding roller.

The rotational motion 70 of the wound roll causes the roll to move out of the pocket in the direction of arrow 68 for subsequent delivery or collection. This motion can be assisted by the difference in relative speeds of the upper
15 and lower winding rollers such that the force of the upper roller dominates. The lower winding roller is optionally equipped with a cover or shroud 64 for a portion of the roller which is not part of the roll winding pocket such that the wound roll may rotate onto a stationary surface.

Referring to Figure 11, the wound roll may be delivered from the roll
20 winding pocket or from the shroud over the lower winding roller to a log discharge deck 65. This deck is a substantially flat surface positioned at an angle to allow the roll 66 to roll away from the wet winding apparatus 41. The deck may be planar or curved. Motion of a wound roll is preferably one of rotation 70 such that, at the point of contact between the tail 96 of the roll and
25 a surface, the motion of the tail is opposite the overall motion of the roll itself. This inhibits any unwinding of the roll. The discharge deck may optionally be equipped with a movable dispenser gate 78. This gate can control the delivery of wound rolls to a collection point or to subsequent processing apparatus. The motion of the dispenser gate may be coordinated with the
30 motion of the rider roller arm 94 and/or the transfer shoe 48 such that accumulation of wound rolls 66 at the gate is minimized or eliminated.

It is preferred that the materials used for the wetting and winding apparatus, as well as any equipment which is in contact with the wetting solution, are resistant to corrosion. The apparatus and their components may also be coated with corrosion resistant materials. Examples of corrosion resistant materials include 316L stainless steel, nickel and its alloys, tungsten carbide, and poly(tetrafluoroethylene) (TEFLON, DUPONT). The components of the apparatus may be controlled by standard controlling equipment and software. For example, the apparatus may be controlled and monitored with a standard programmable logic controller (PLC). Individual apparatus may have separately controls, and these controls may be operably linked with the main control for the overall apparatus. For example, the winding apparatus may be controlled and monitored with a PanelMate Human Machine Interface (HMI). The HMI can control the starting, stopping, and other parameters that affect the wetting and winding of the web. The HMI may interface to the PLC (Programmable Logic Controller) that actually controls the machine.

CLAIMS

1. A method of winding a wet web, comprising:
providing a wet web of material;
applying a wetting solution to the web to produce a wet web, the
5 wetting solution comprising a salt; and
winding the wet web into a wet roll;
wherein the variability of the salt throughout the wet roll is less
than about 20%.
2. The method of claim 1, wherein the variability of the salt is less
10 than about 10%.
3. The method of claim 1, wherein the variability of the salt is less
than about 5%.
4. The method of claim 1, wherein the variability of the salt is less
than about 3%.
- 15 5. The method of claim 1, wherein the wetting solution further
comprises at least one preservative; the variability of each preservative
throughout the wet roll being less than about 60%.
6. A method of making wet rolls, comprising:
providing a web of material;
20 applying a wetting solution to the web to produce a wet web, the
wetting solution comprising at least one preservative; and
winding the wet web into a wet roll;
wherein the variability of each preservative throughout the wet
roll is less than about 60%.
- 25 7. The method of claim 6, wherein the variability of each
preservative is less than about 50%.

8. The method of claim 6, wherein the variability of each preservative is less than about 40%.

9. The method of claim 6, wherein the variability of each preservative is less than about 35%.

5 10. The method of claim 9, wherein the wetting solution further comprises a salt.

11. The method of claim 10, wherein the salt is an inorganic salt.

12. A method of making wet rolls, comprising:
providing a web of material;
10 applying a wetting solution to the web to produce a wet web, the wetting solution comprising a salt and at least one preservative; and
winding the wet web into a wet roll;
wherein the variability of the salt throughout the wet roll is less than about 10%, and the variability of each preservative throughout the wet
15 roll is less than about 50%.

13. The method of claim 12, wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%.

14. The method of claim 12, wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%.

15. The method of claim 12, wherein the variability of the salt throughout the wet roll is at most about 2.5%, and the variability of each preservative throughout the wet roll is at most about 32.5%.

16. The method of claim 12, wherein the salt is inorganic.

17. The method of claim 16, wherein the salt is sodium chloride.

18. The method of claim 12, wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid.

19. The method of claim 12, wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid.

20. The method of claim 12, wherein the web comprises a water-dispersible binder.

21. The method of claim 12, wherein the wet roll is coreless.

22. A wet coreless roll, comprising:
a basesheet;
a salt; and
at least one preservative;
wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each preservative throughout the wet roll is less than about 60%.

23. The wet coreless roll of claim 22, wherein the variability of the salt throughout the wet roll is less than about 10%, and the variability of each preservative throughout the wet roll is less than about 50%.

24. The wet coreless roll of claim 22, wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%.

25. The wet coreless roll of claim 22, wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%.

26. The wet coreless roll of claim 22, wherein the salt is inorganic.

27. The wet coreless roll of claim 26, wherein the salt is sodium chloride.

28. The wet coreless roll of claim 22, wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid.

5 29. The wet coreless roll of claim 22, wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid.

30. The wet coreless roll of claim 22, wherein the basesheet comprises a water-dispersible binder.

10 31. A wet coreless roll prepared by a process comprising:
providing a web of material;
applying a wetting solution to the web to produce a wet web, the wetting solution comprising a salt and at least one preservative; and
winding the wet web into a wet roll.

15 32. The wet coreless roll of claim 31, wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each preservative throughout the wet roll is less than about 60%.

33. The wet coreless roll of claim 31, wherein the variability of the salt throughout the wet roll is less than about 10%, and the variability of each preservative throughout the wet roll is less than about 50%.

20 34. The wet coreless roll of claim 31, wherein the variability of the salt throughout the wet roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%.

35. The wet coreless roll of claim 31, wherein the variability of the salt throughout the wet roll is less than about 3%, and the variability of each preservative throughout the wet roll is less than about 35%.

25 36. The wet coreless roll of claim 31, wherein the salt is inorganic.

37. The wet coreless roll of claim 36, wherein the salt is sodium chloride.

38. The wet coreless roll of claim 31, wherein the preservative comprises a substance selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid.

39. The wet coreless roll of claim 31, wherein the preservative comprises IPBC, DMDM Hydantoin, and malic acid.

40. The wet coreless roll of claim 31, wherein the web of material comprises a water-dispersible binder.

41. A wet coreless roll, comprising:
a basesheet comprising a water-dispersible binder;
sodium chloride; and
at least one preservative selected from the group consisting of IPBC, DMDM Hydantoin, and malic acid;
wherein the variability of the inorganic salt throughout the wet coreless roll is less than about 5%, and the variability of each preservative throughout the wet roll is less than about 40%.

42. A method of winding a wet web, comprising:
providing a wet web of material;
applying a wetting solution to the web to produce a wet web, the wetting solution comprising at least about 0.5% of a salt; and
winding the wet web into a wet roll;
wherein the variability of the salt throughout the wet roll is less than about 20%.

43. A wet roll, comprising:
a basesheet;
a salt; and
at least one preservative;
wherein the variability of the salt throughout the wet roll is less than about 20%, and the variability of each preservative throughout the wet roll is less than about 60%.

ABSTRACT

A method of making wet rolls includes providing a web of material, applying a wetting solution to the web to produce a wet web, and winding the wet web into a roll. The wetting solution may include an inorganic salt and at least one preservative. The wetting solution may be distributed evenly throughout the wet roll.


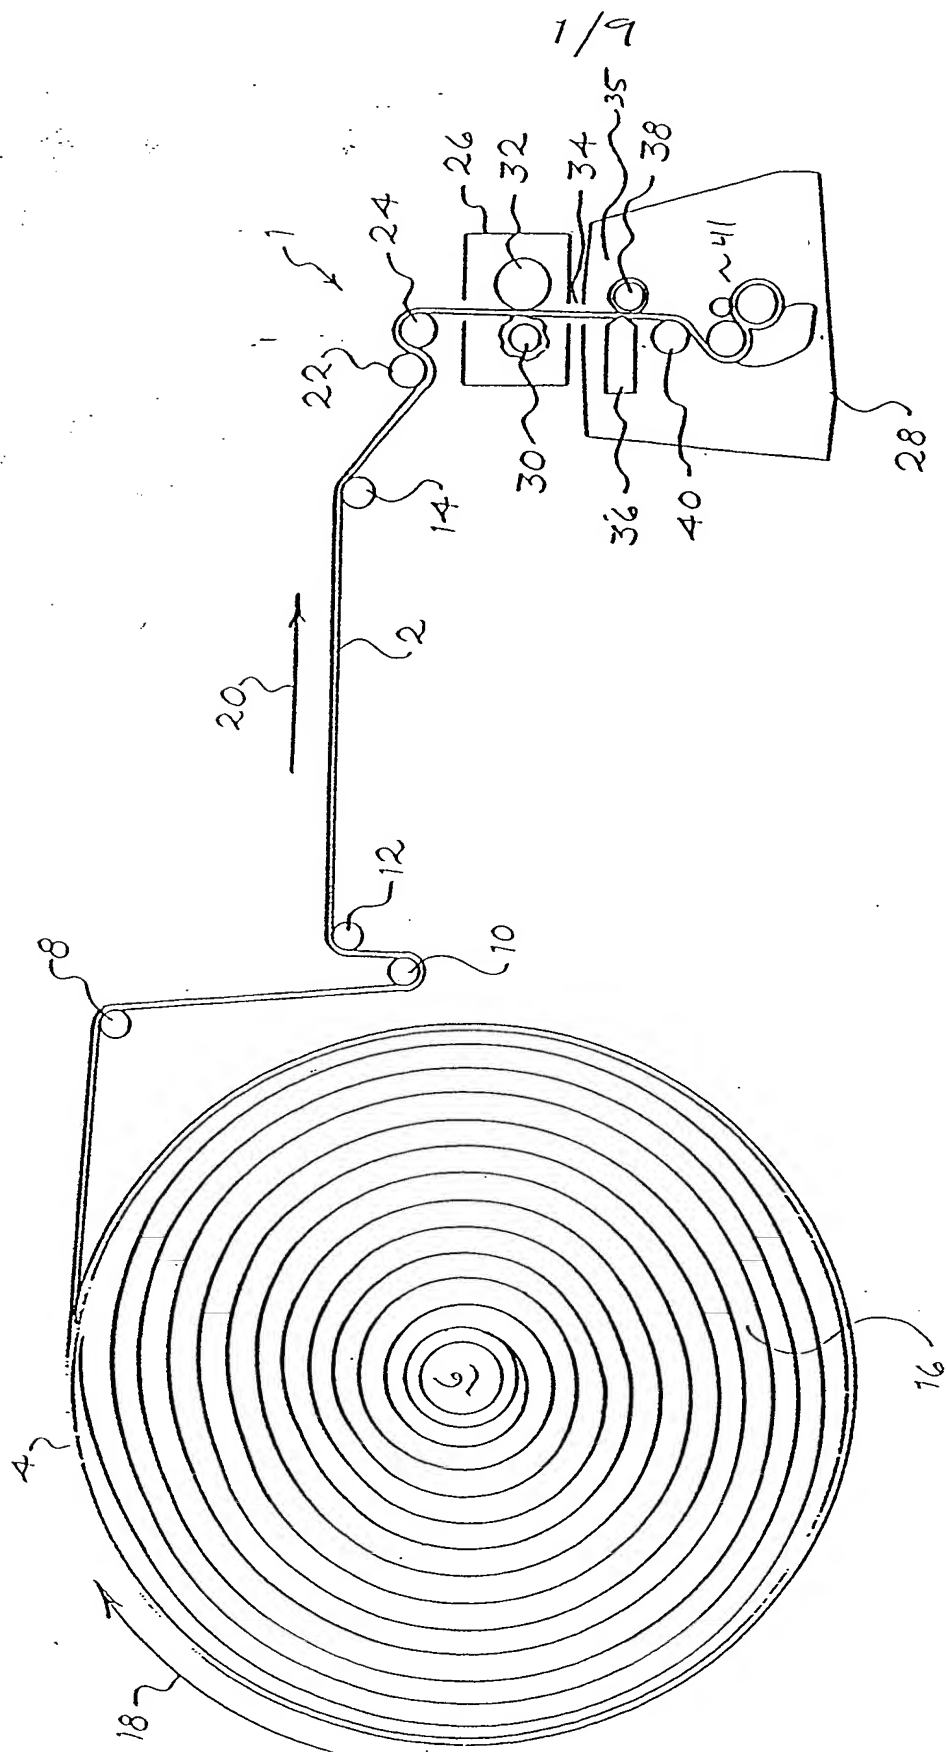


Fig. 1

2/9

Fig. 2

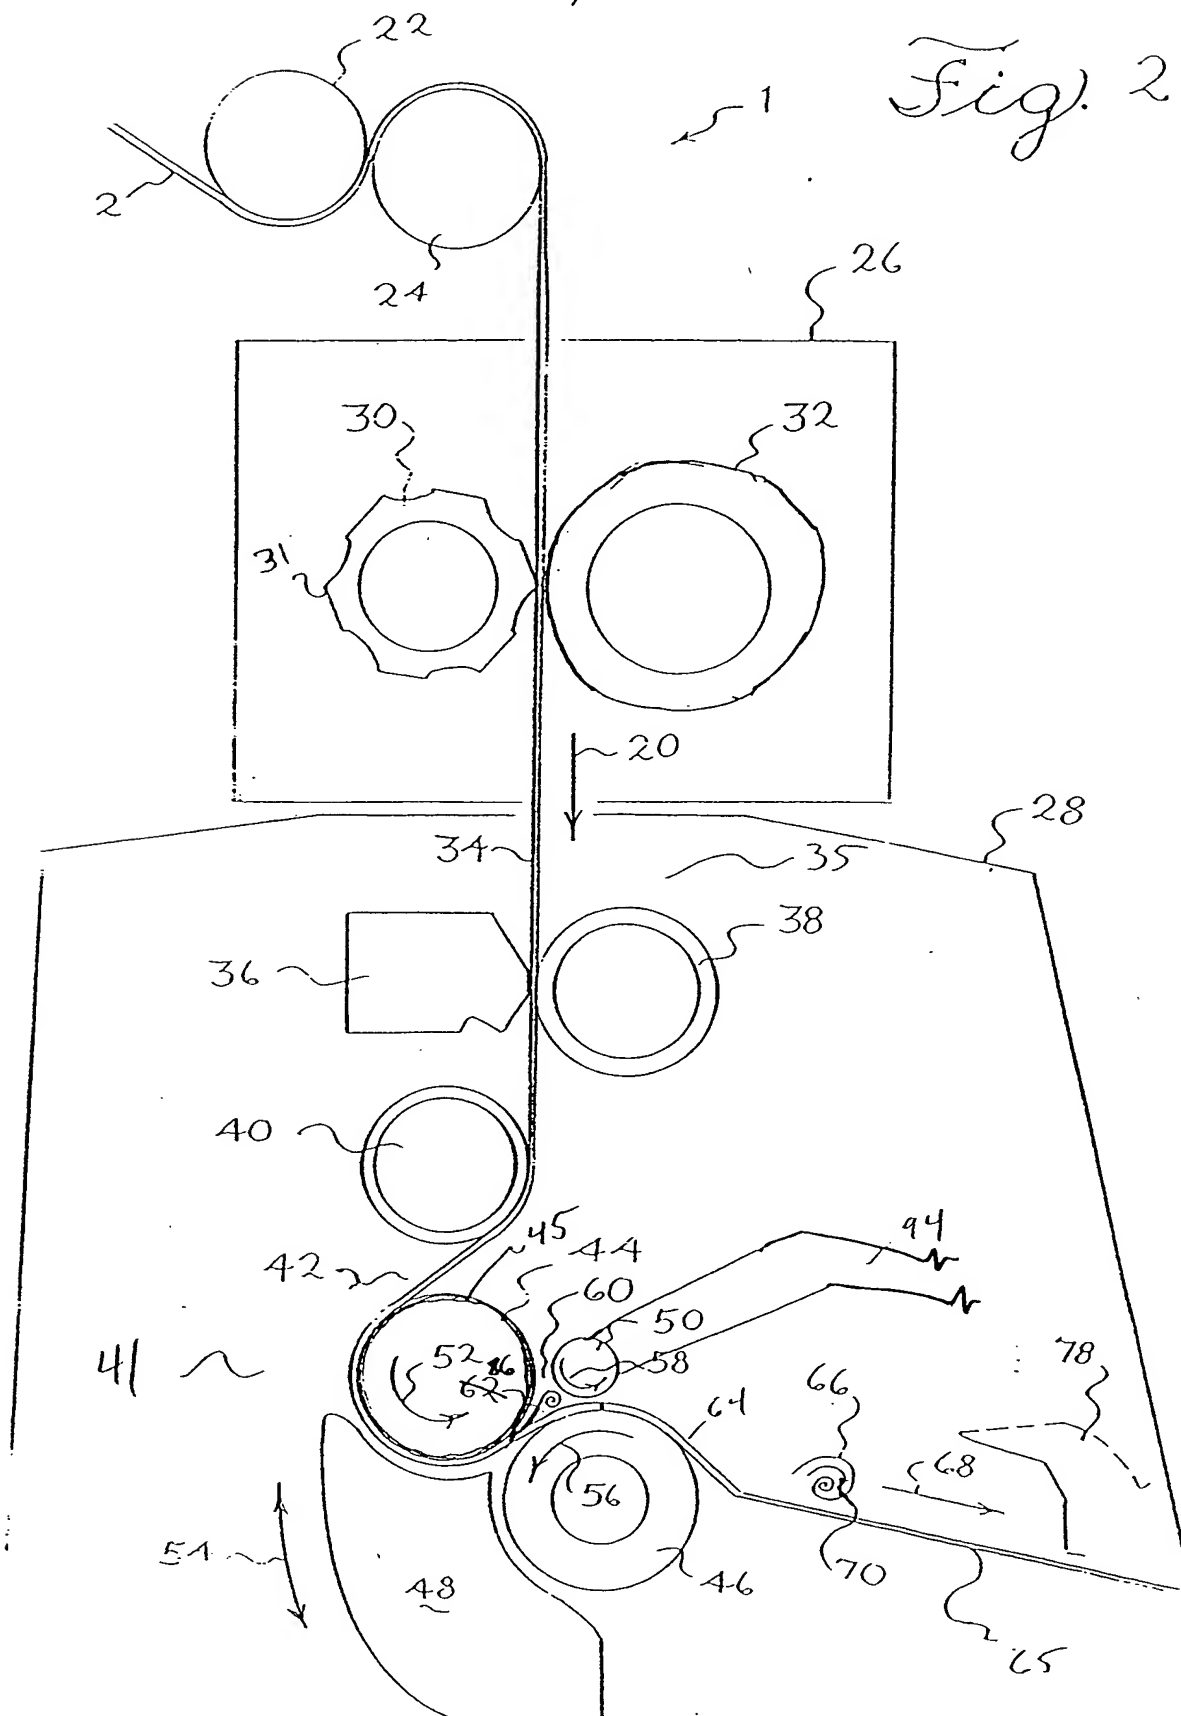

3/9

Fig. 3

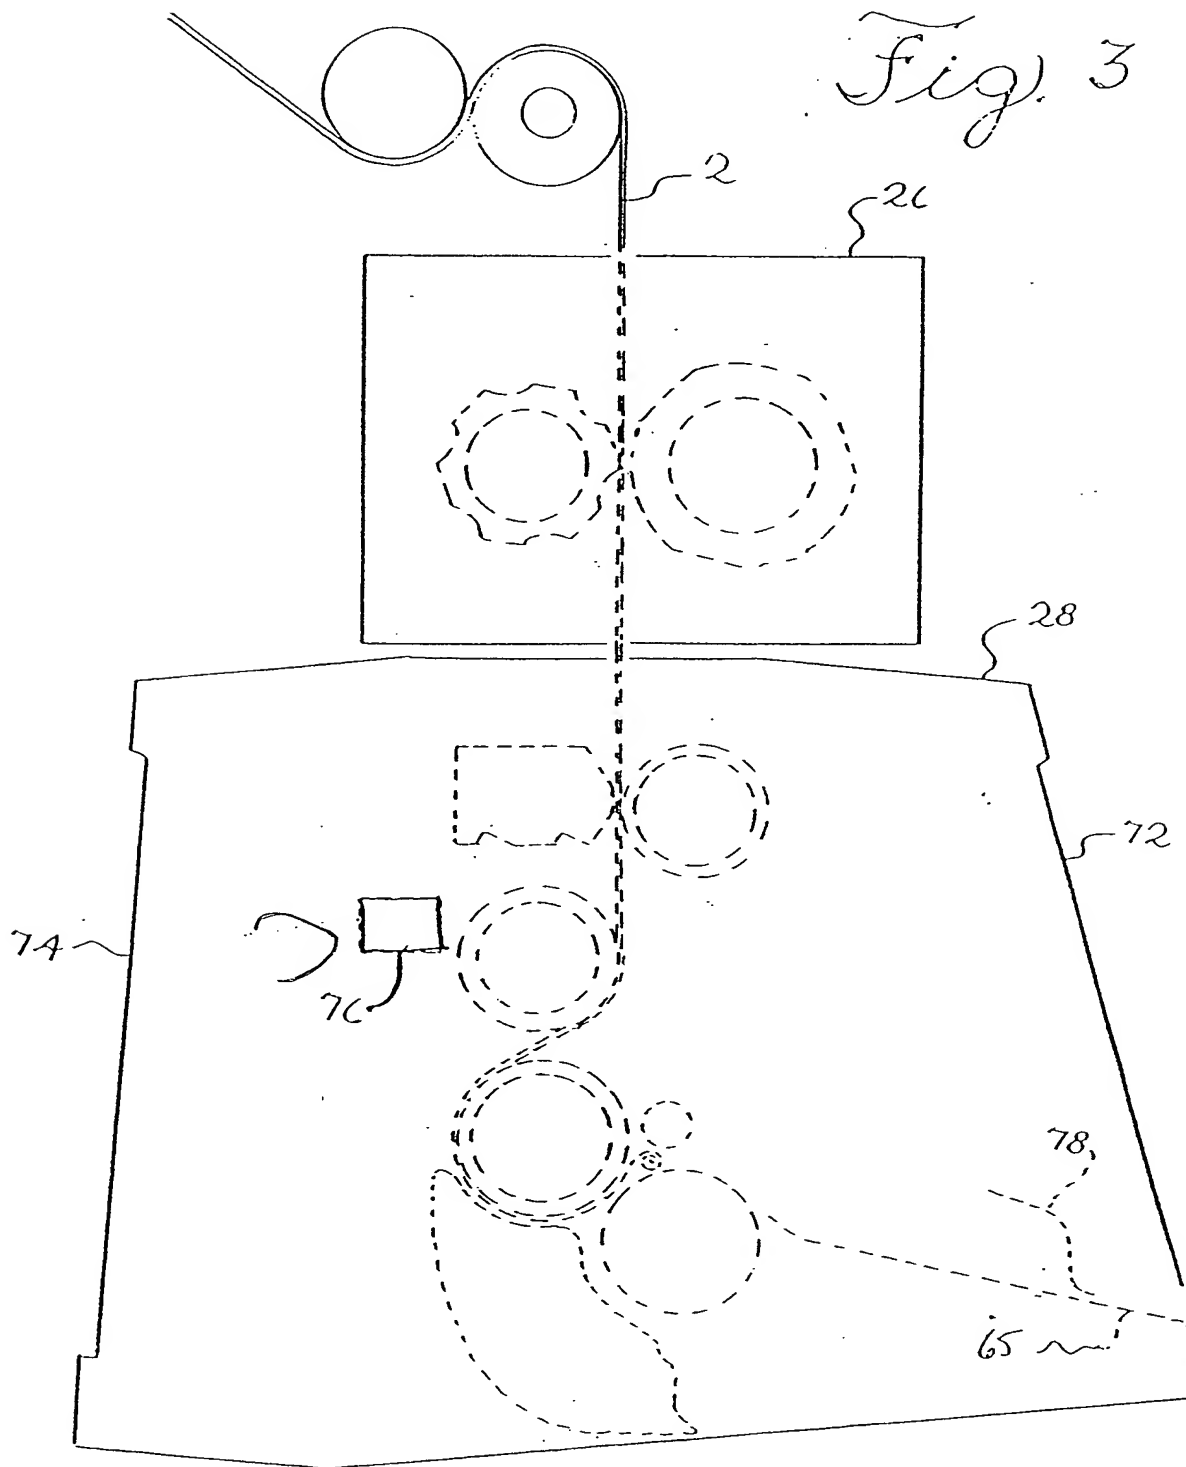


Fig. 4

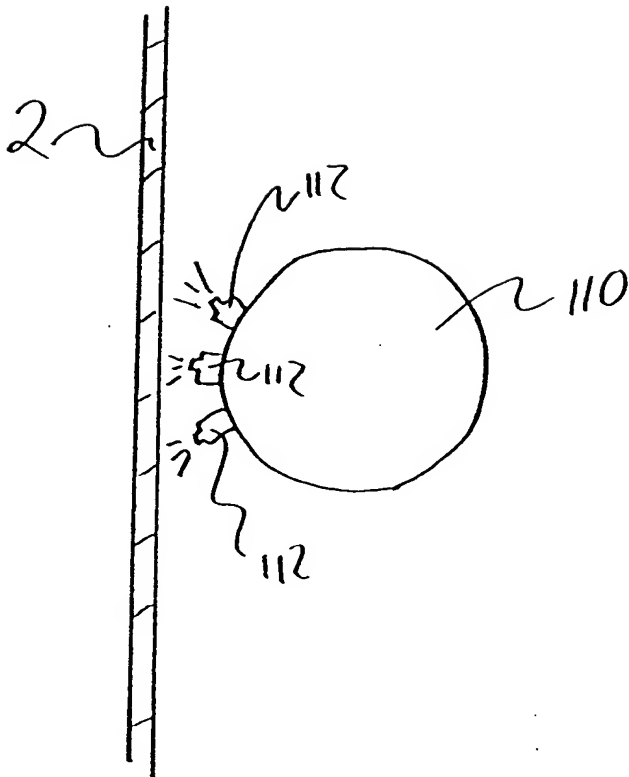
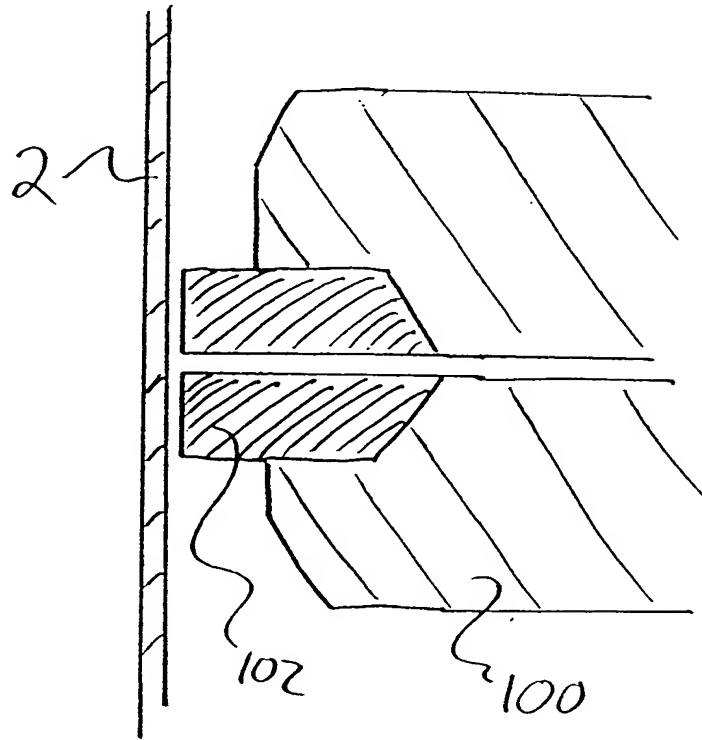


Fig. 5

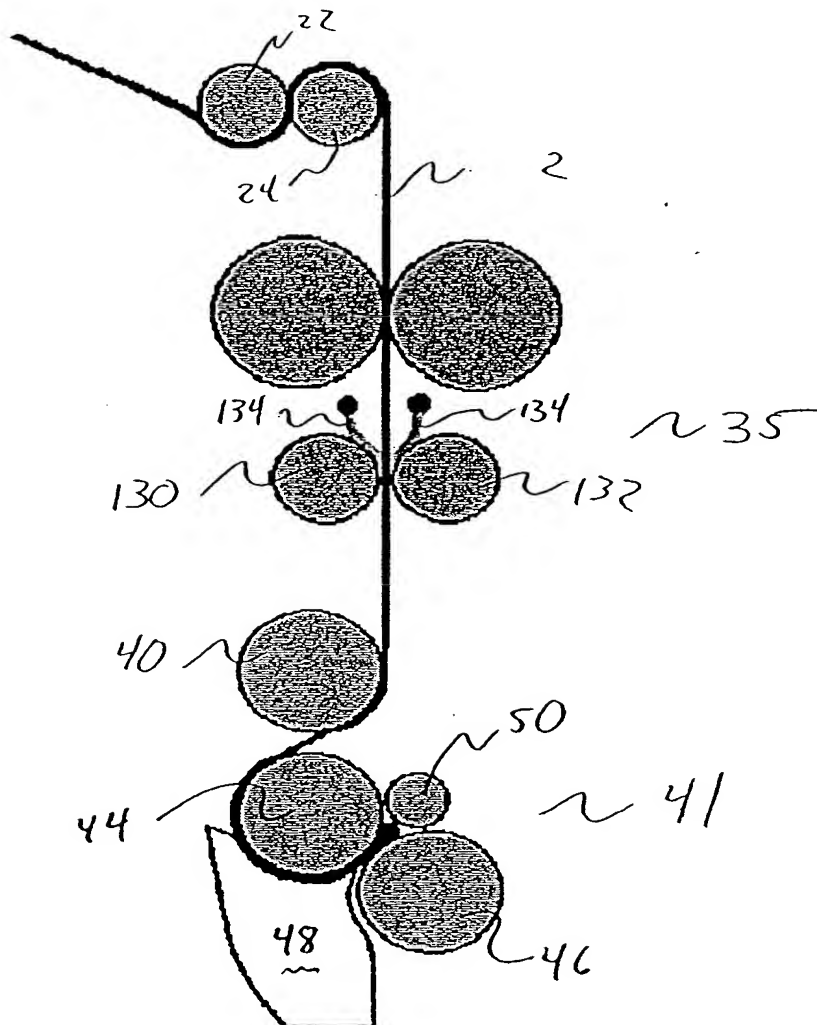


Figure 6

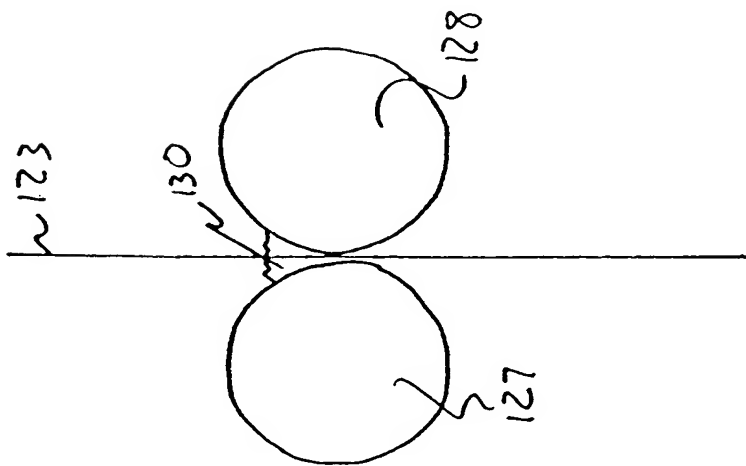


Fig. 9

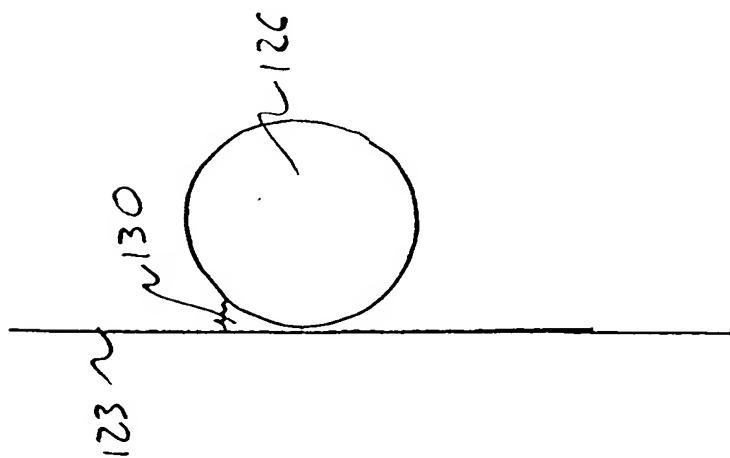


Fig. 8

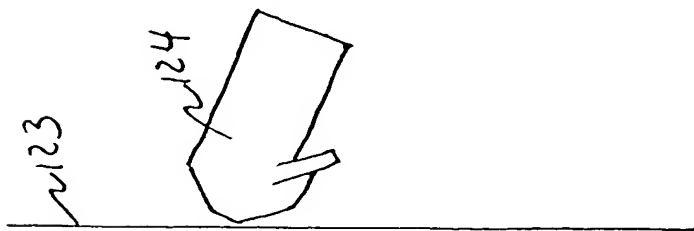




Fig. 7



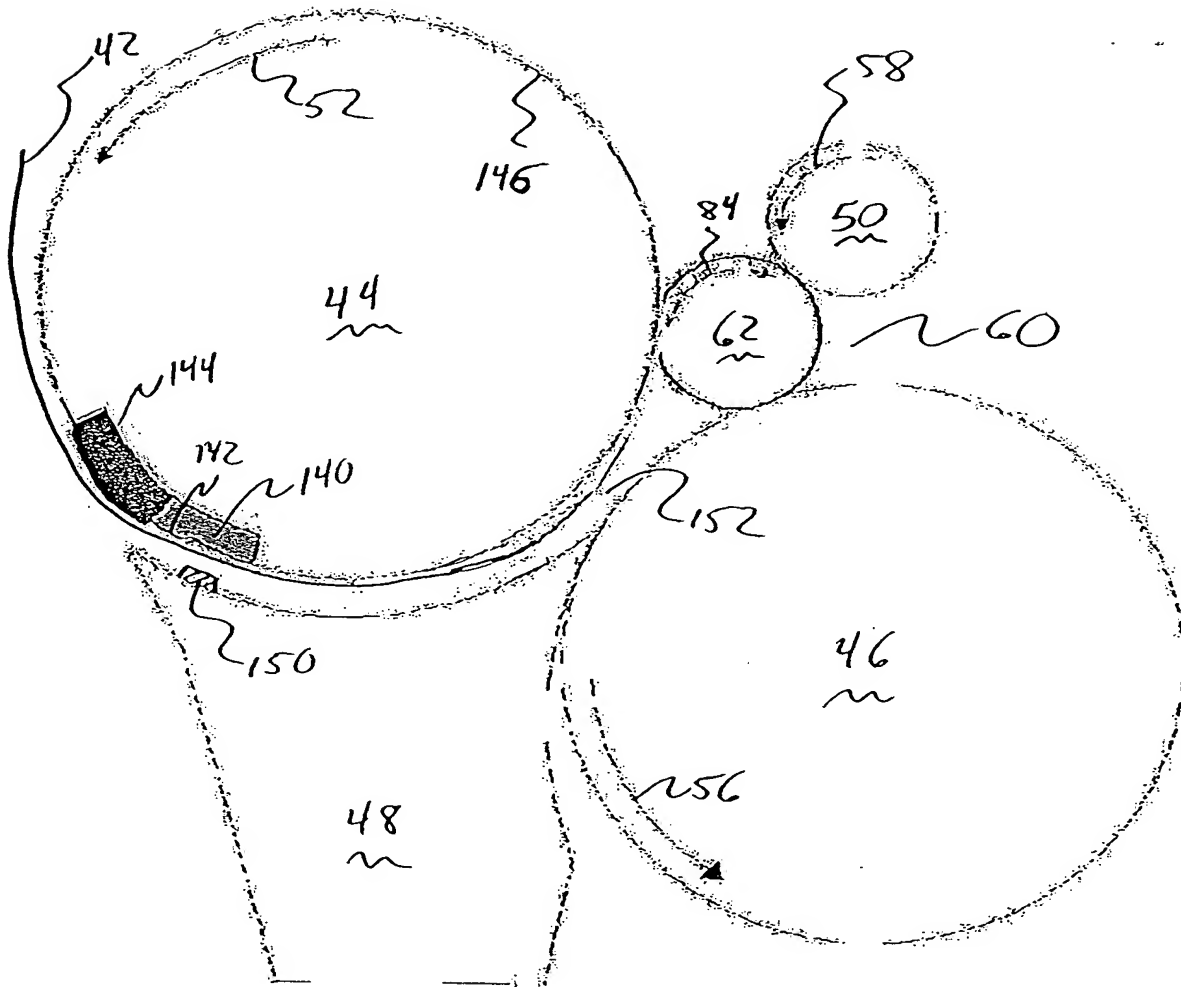


Fig. 12



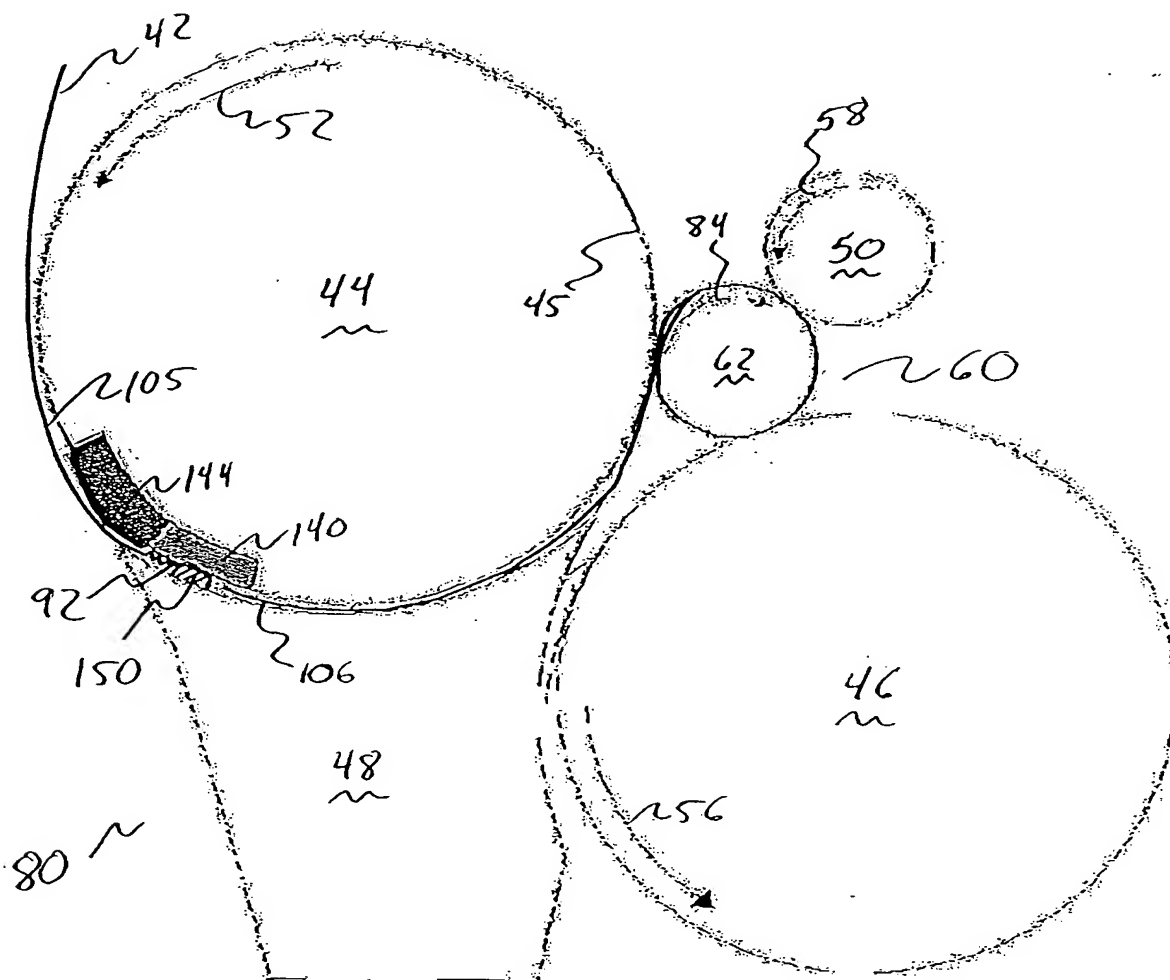


Fig. 13



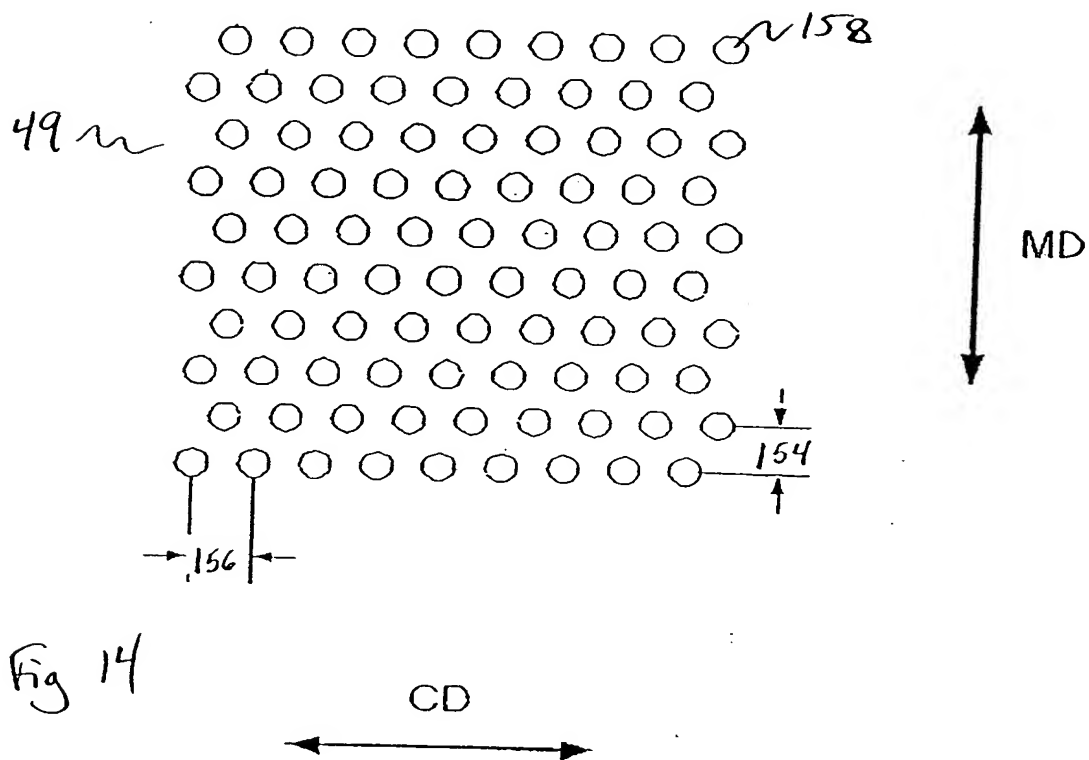

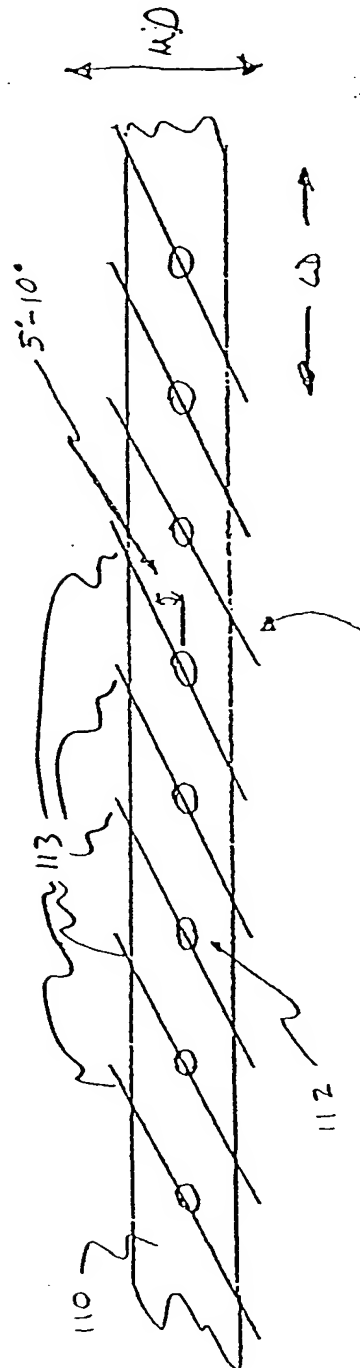

"Express Mail" mailing label number EL 835293200 US

Date of Deposit: September 17, 2003

Our Case No. 659/1770

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	
)	
Daniel Hoo et al.)	
)	Examiner --
)	
Serial No. --)	
)	Group Art Unit No. --
)	
Filing Date: September 17, 2003)	
)	
For WET ROLL HAVING UNIFORM)	
COMPOSITION DISTRIBUTION)	

PRELIMINARY AMENDMENT

Mail Stop Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-4150

Dear Sir:

Please enter the following preliminary amendment.

AMENDMENTS TO THE SPECIFICATION

On page 1, between lines 1 and 2, please insert the following paragraph:

RELATED APPLICATIONS

This application is a division of U.S. Patent Application Serial No. 09/900,516, filed July 6, 2001, which is incorporated herein by reference.

Please replace the paragraph of lines 3-19 on page 14 with the following paragraph:

Even application of the wetting solution can help to provide uniform distribution of the ingredients initially present in the solution, such as dispersibility agents, preservatives, fragrances, or other additives. The distribution of ingredients may be uniform within the web of material in both the cross-direction and the machine-direction. Wet rolls made from such a web then may also have a uniform distribution of ingredients, and this uniformity may be consistent within a roll (i.e. from the outside to the center, and from one end of the roll to the other) or from one roll to another. A uniform distribution of ingredients provides for consistent storage and dispensing characteristics of a roll of wet wipes. For example, the entire roll can be equally protected from contamination if there is uniform distribution of a preservative. In another example, the roll can be dispensed acceptably regardless of the number of sheets which remain in the roll. Dispensing characteristics include, for example, peel strength, tensile strength, and perf strength, as defined in the above mentioned US application serial number 09/659,307. These may be independently affected by the distribution of the wetting solution.

Please replace the paragraph from line 11 on page 21 to line 2 on page 22 with the following paragraph:

Referring to Figures 10-13, the wet winding apparatus 41 includes an upper winding roller 44, a lower winding roller 46, and a rider roller 50. The upper winding roller rotates in the direction of arrow 52, so that, when in contact with the wet web, it is moving in the same direction as the web. At a point downstream from the point where the web 42 and the upper winding roller meet, the lower winding roller 46 contacts the exposed side of the web. The lower winding roller rotates in the direction of arrow 56, which is opposite that of the motion of the wet web ~~when the roller and web are in contact~~ as it enters the winding pocket. It follows that the upper and lower winding rollers rotate in the same circular direction (i.e. clockwise or counter-clockwise). The contact of both the upper winding roller and the transfer shoe 48 on the web breaks the web into a downstream portion 106 and an upstream portion 105 (Figure 13). This contact also causes the leading edge of the upstream portion of the web to fold or bunch together into an embryonic roll, called a cigarette 86. The cigarette 86 is caused to rotate in the circular direction 84, which is opposite that of the winding rollers, to form a roll 62. The rider roller 50 is positioned to contact the rotating roll 62 after the point of contact between the winding rollers. The convergence of the rider roller with the winding rollers forms a roll winding pocket 60. The rider roller rotates in the same circular direction 58 as the winding rollers, thus coordinating with the winding rollers to promote rotation of the wet web, in the direction of arrow 84, into a wet roll 62. The rider roller also helps prevent the wet roll from leaving the pocket before a roll of the desired dimensions and/or sheet content is formed.

REMARKS


Claims 22-43 have been cancelled. Claims 1-21 are pending.

The specification has been amended to recite a reference to the prior-filed co-pending patent application, pursuant to 37 CFR § 1.78(a)(2). The specification also has been amended to correct a typographical error (p. 14, lines 3-19) and to reduce the likelihood of any misreading of the description (p. 21, line 11 – p. 22, line 2). No new matter has been added.

Applicants submit that the present application is now ready for examination on the merits. Should the Examiner feel a discussion would expedite the prosecution of this application, the Examiner is kindly invited to contact the undersigned.

Respectfully submitted,

9/17/03



Jonathan P. Taylor, Ph.D.
Registration No. 48,338
Agent for Applicant

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200